




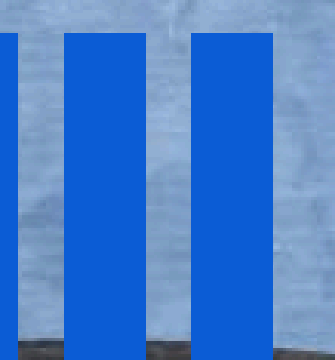


TARGET 350

HOMOGENIOUS VINYL FLOORING

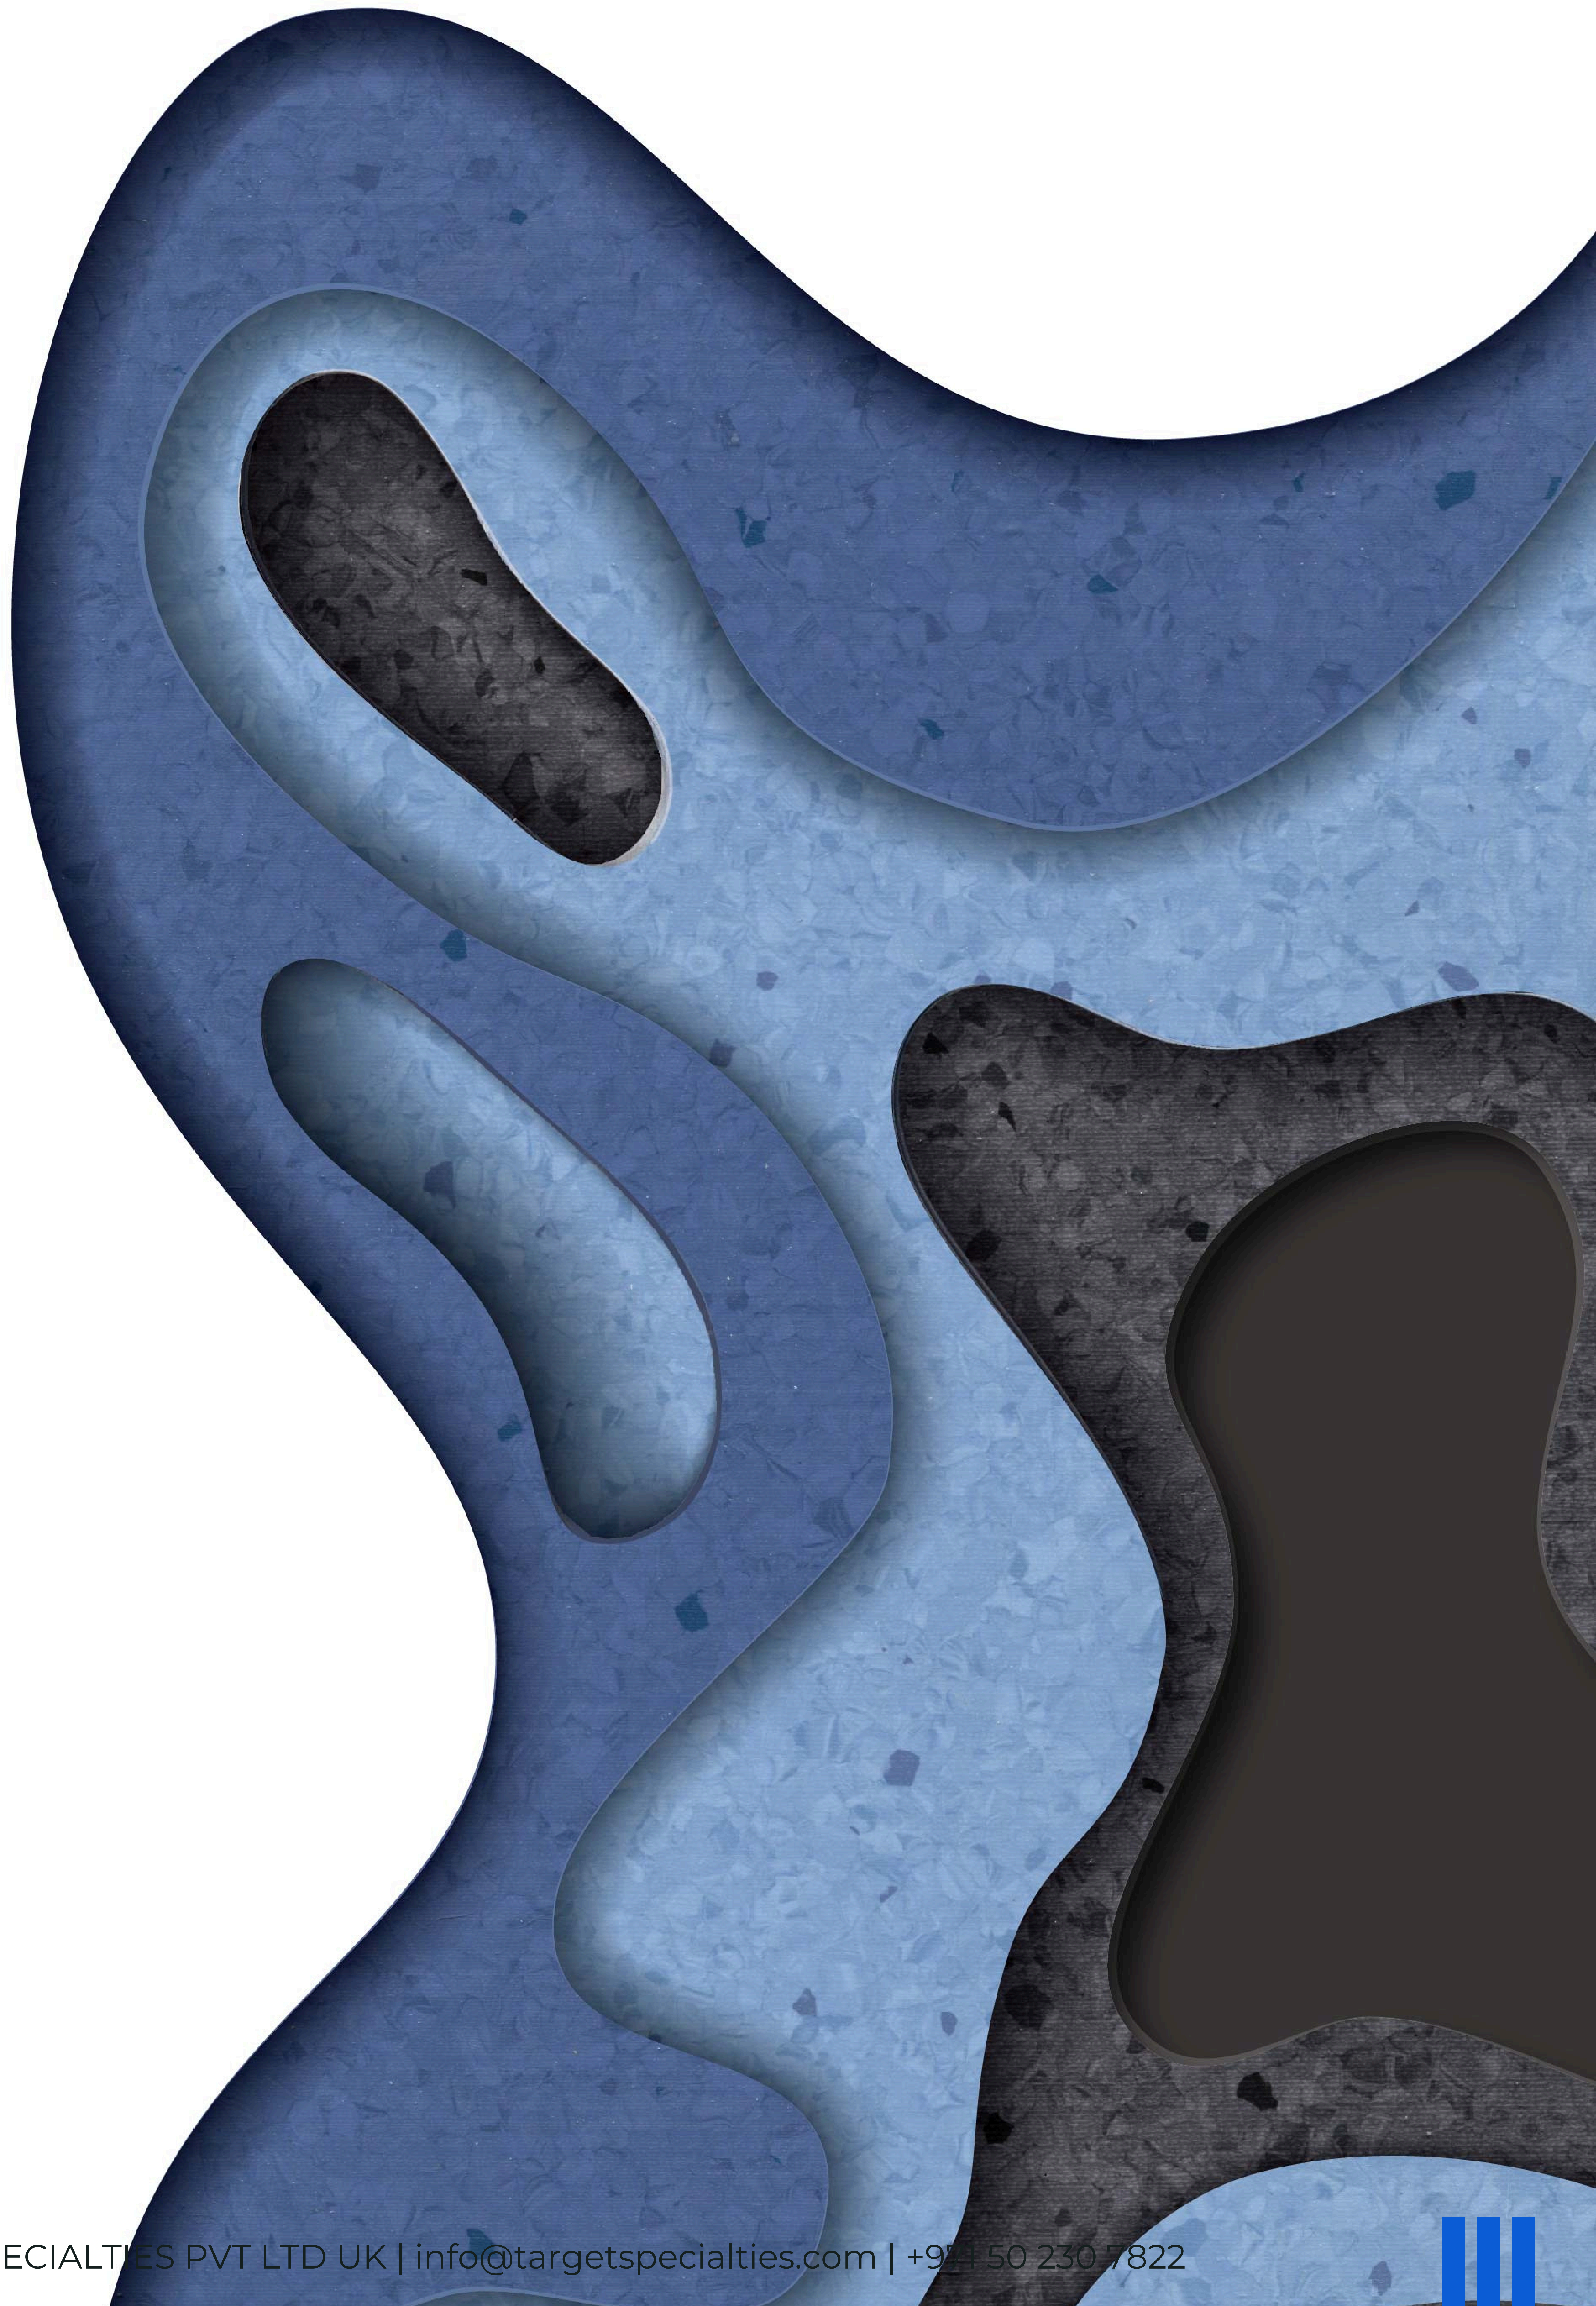


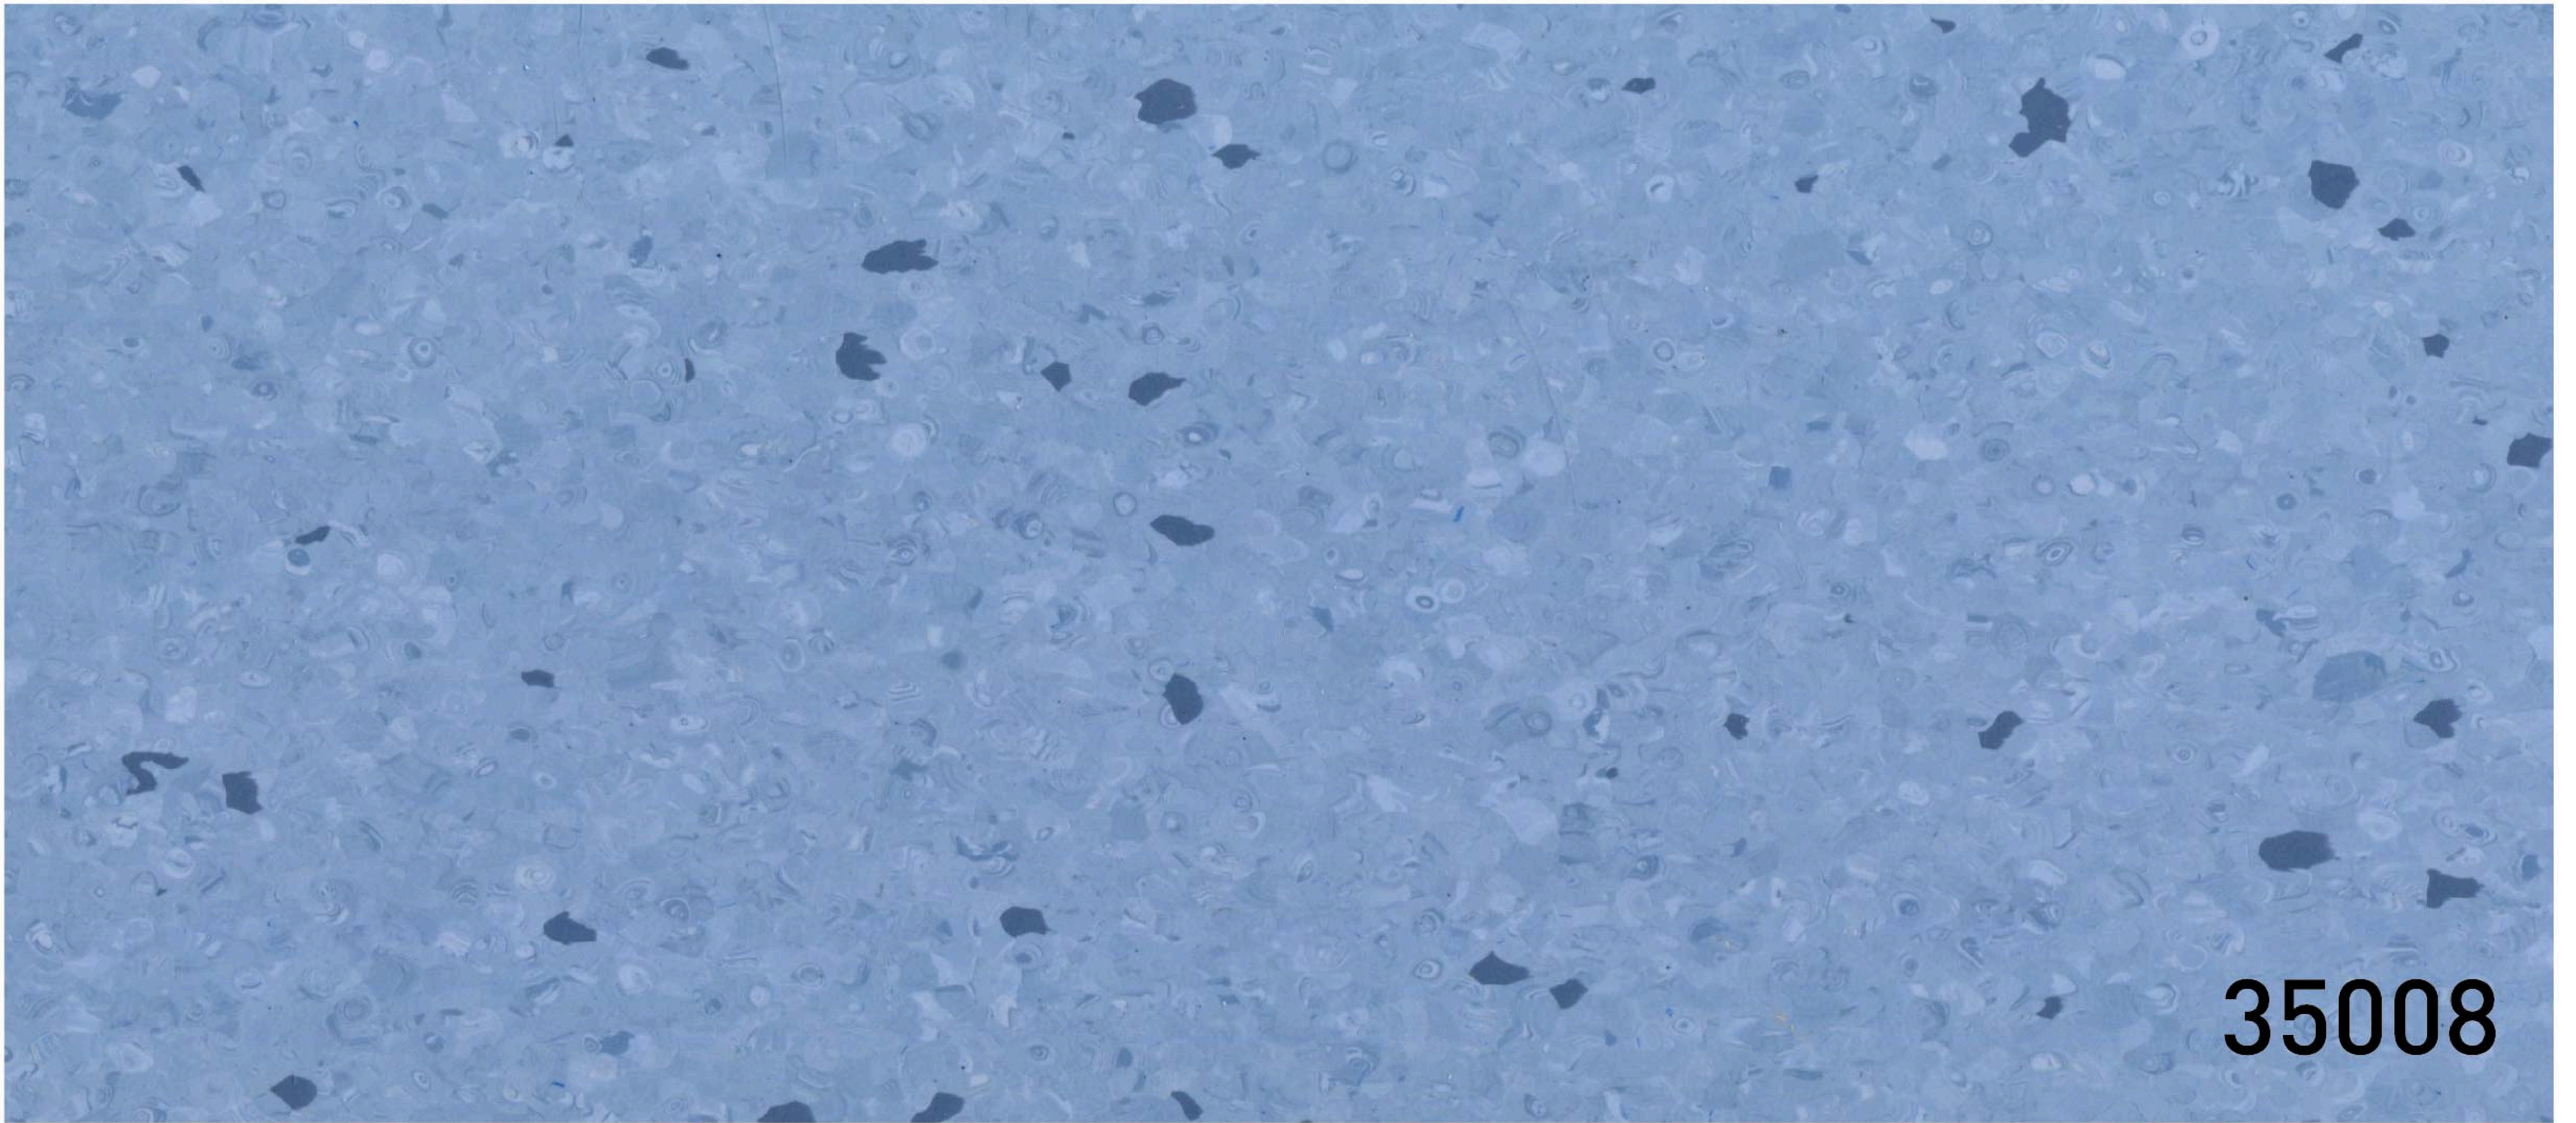

35008

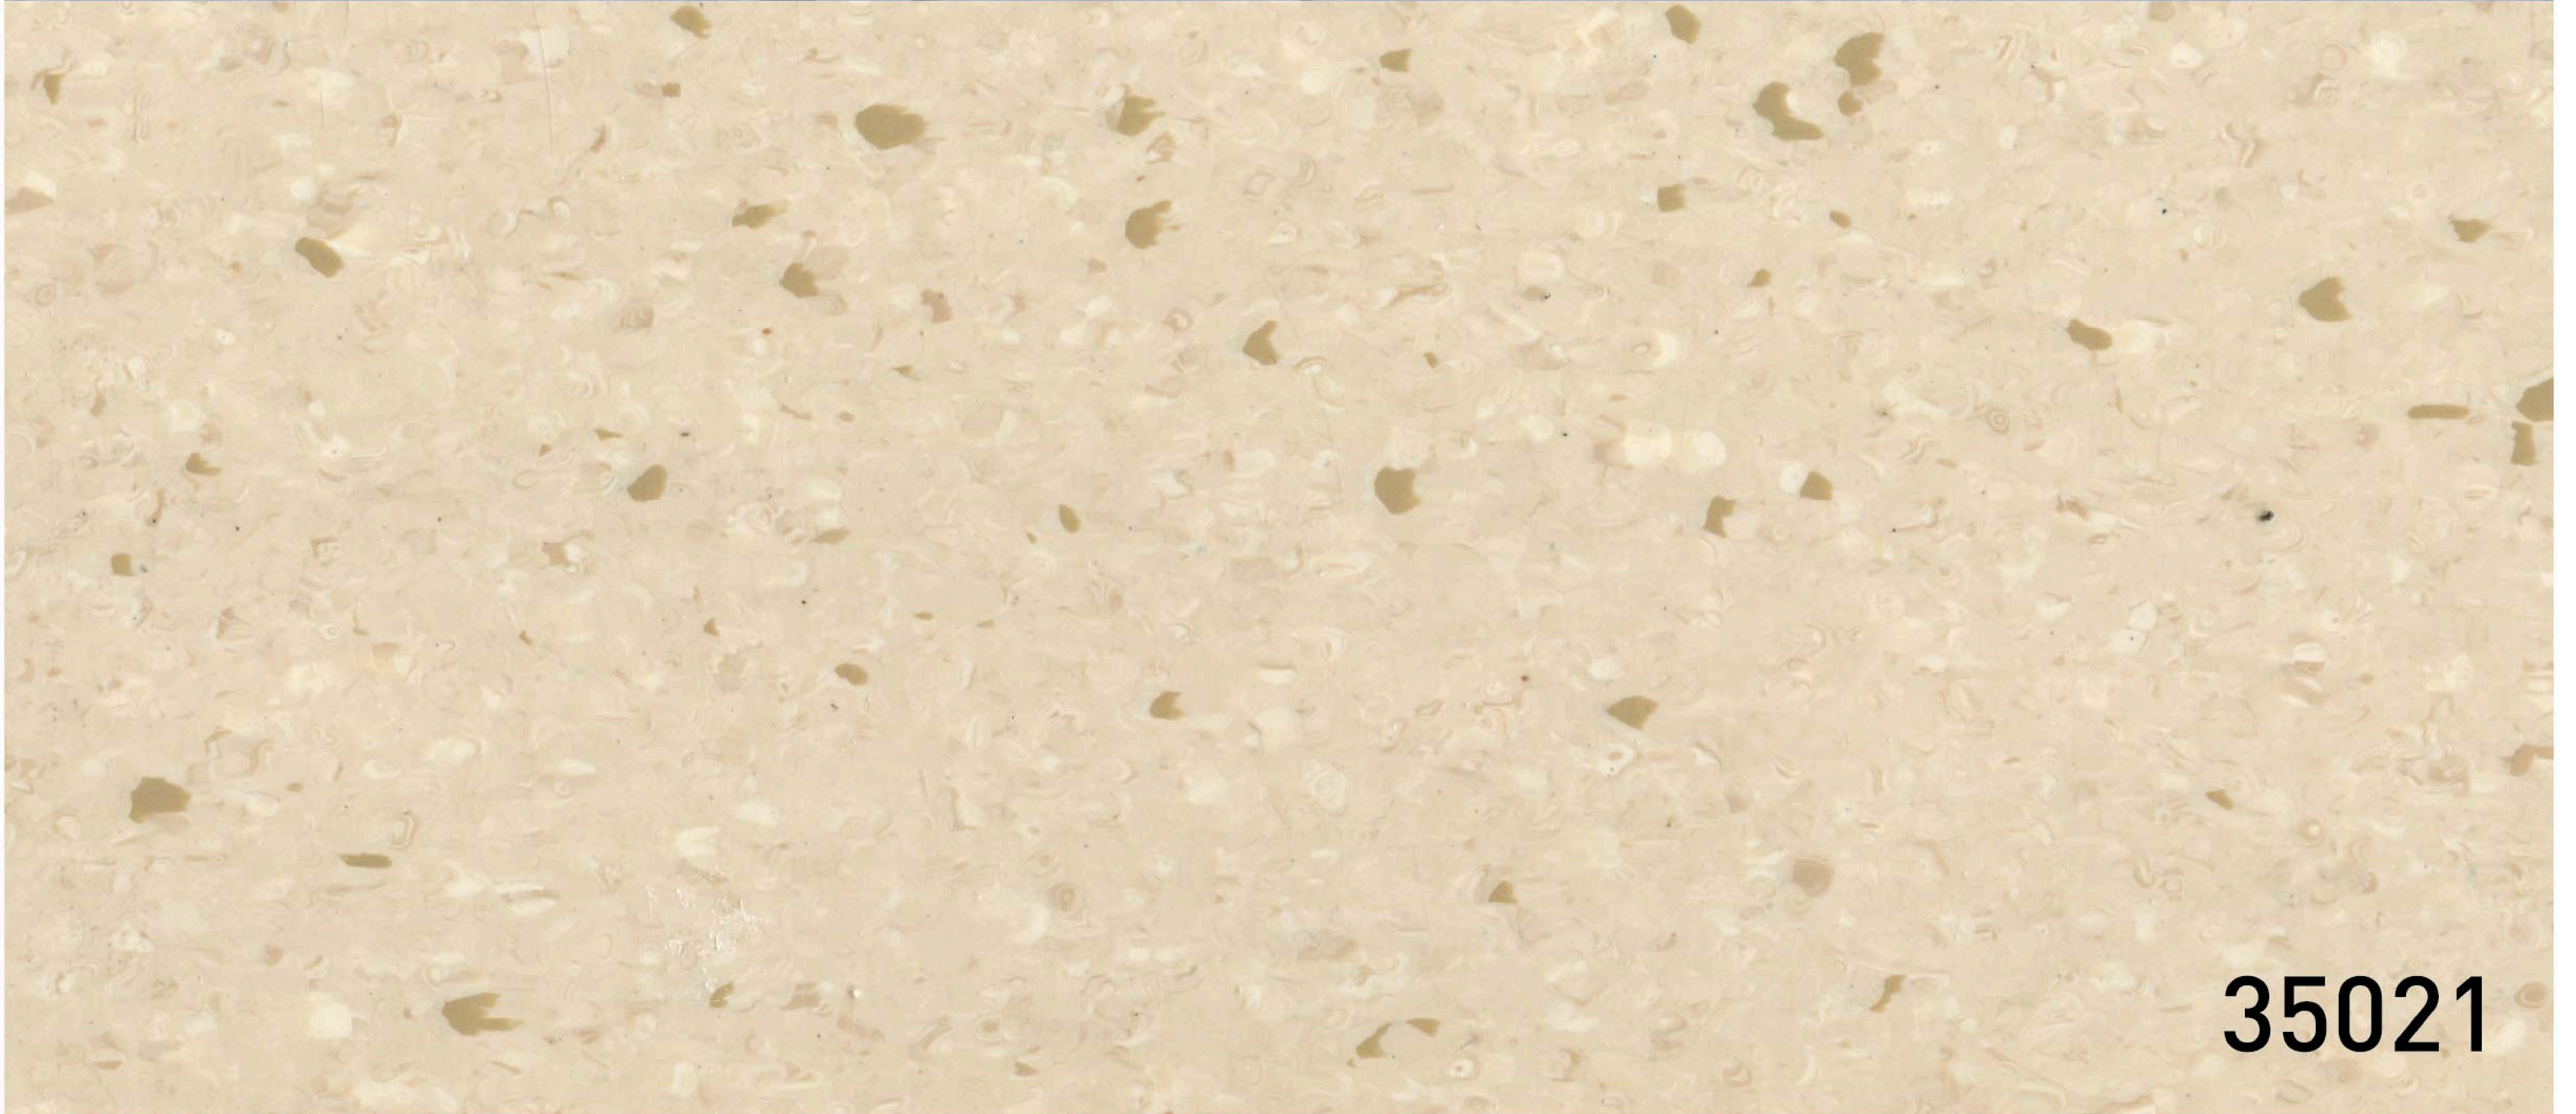

35021

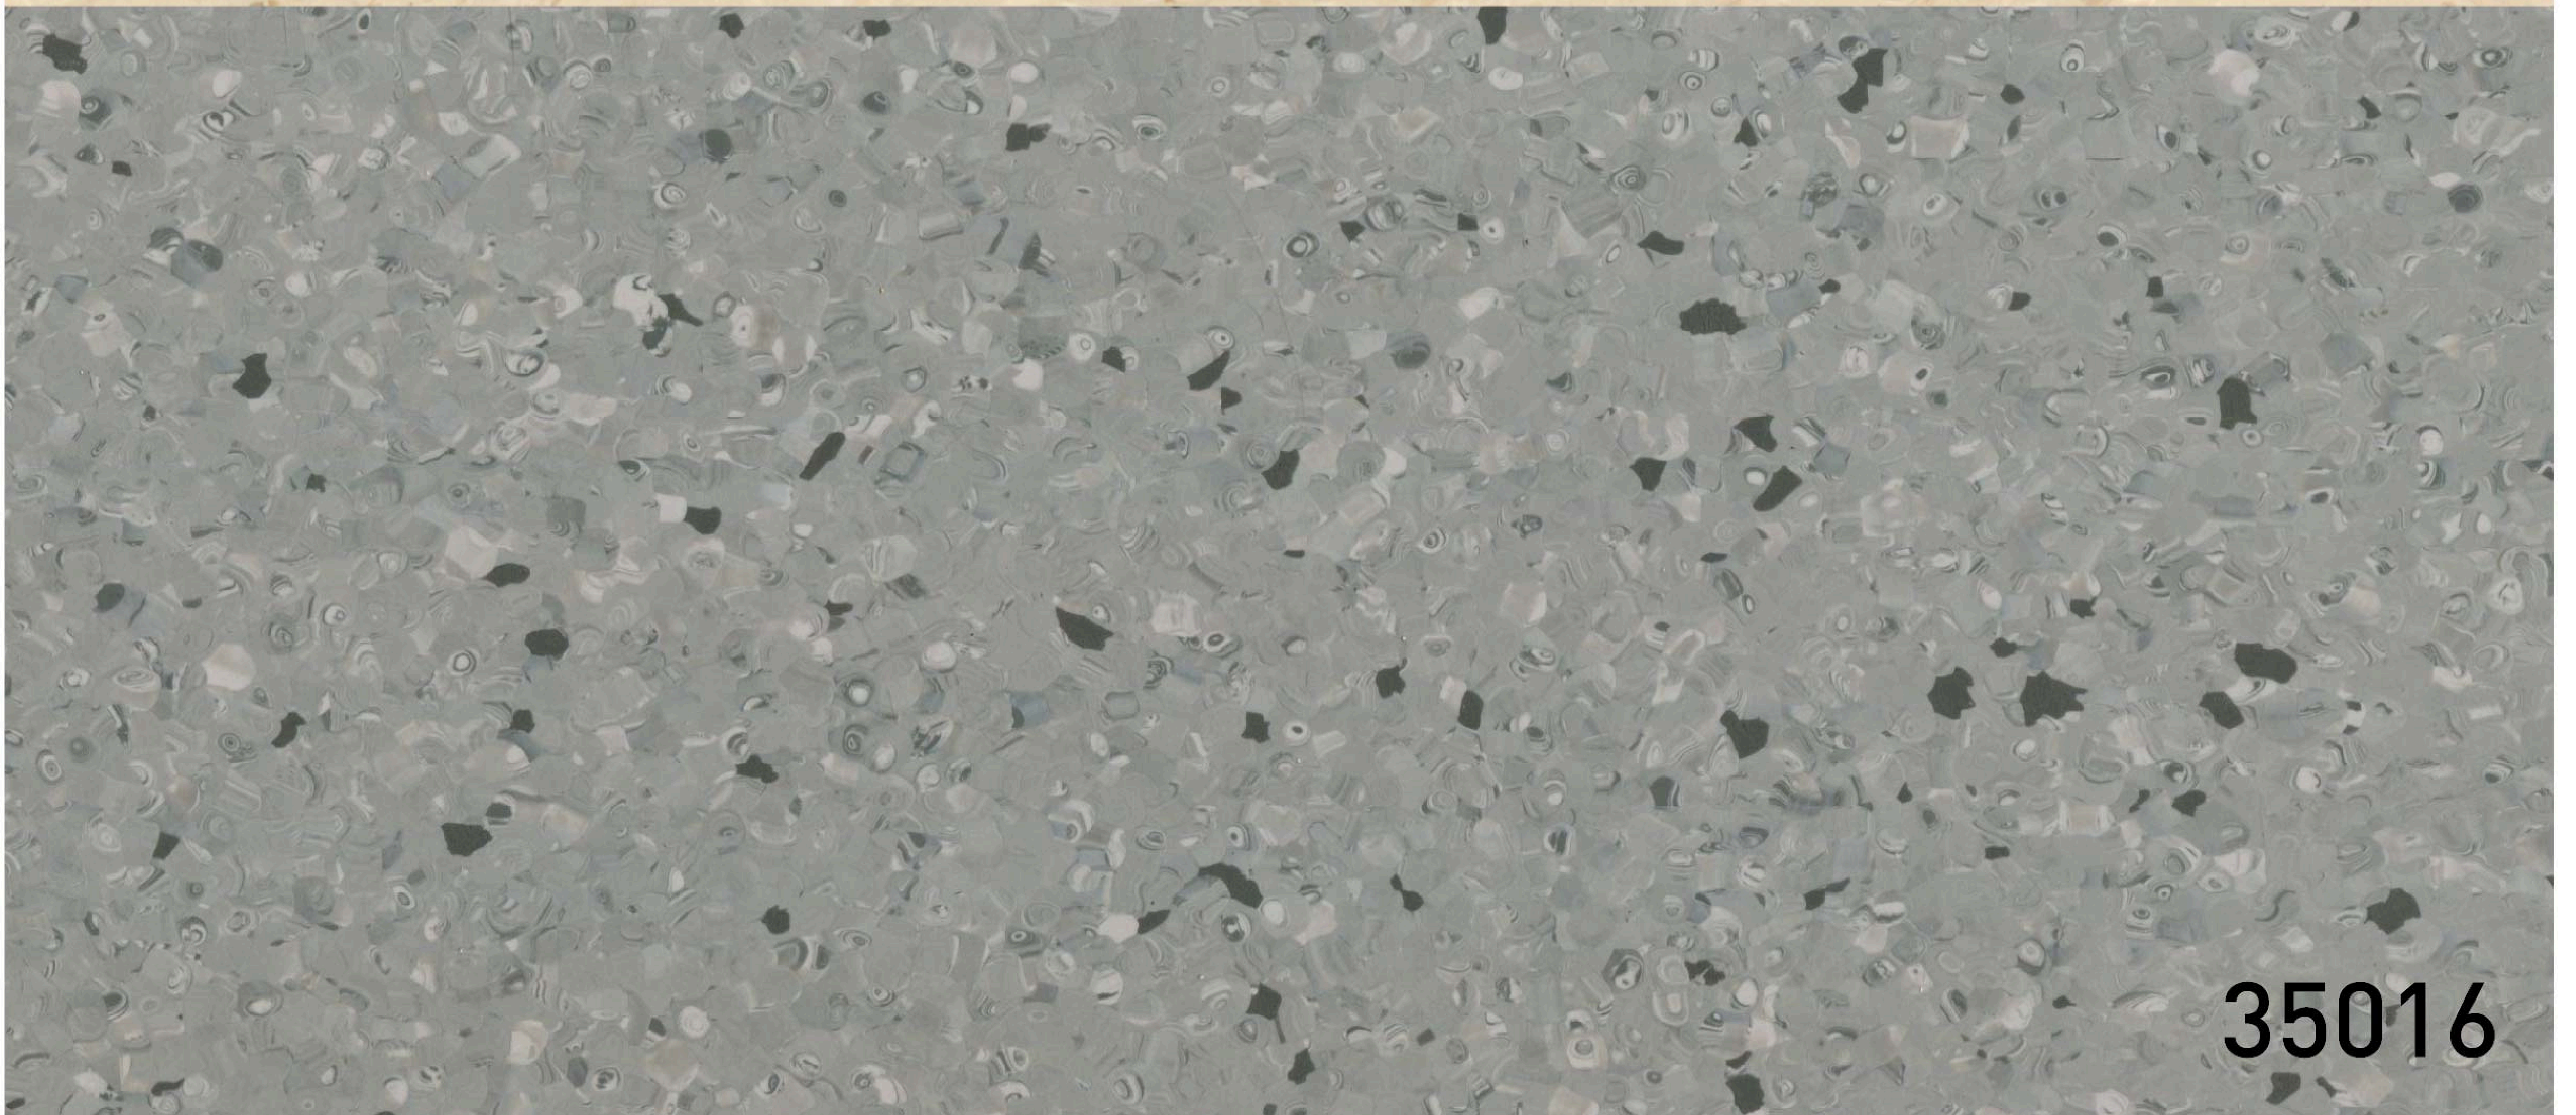

35016

TARGET 350

HOMOGENIOUS VINYL FLOORING


SIZE: 2.0mm x 2.0m x 20m



35015 Silver grey



35001 Smoke

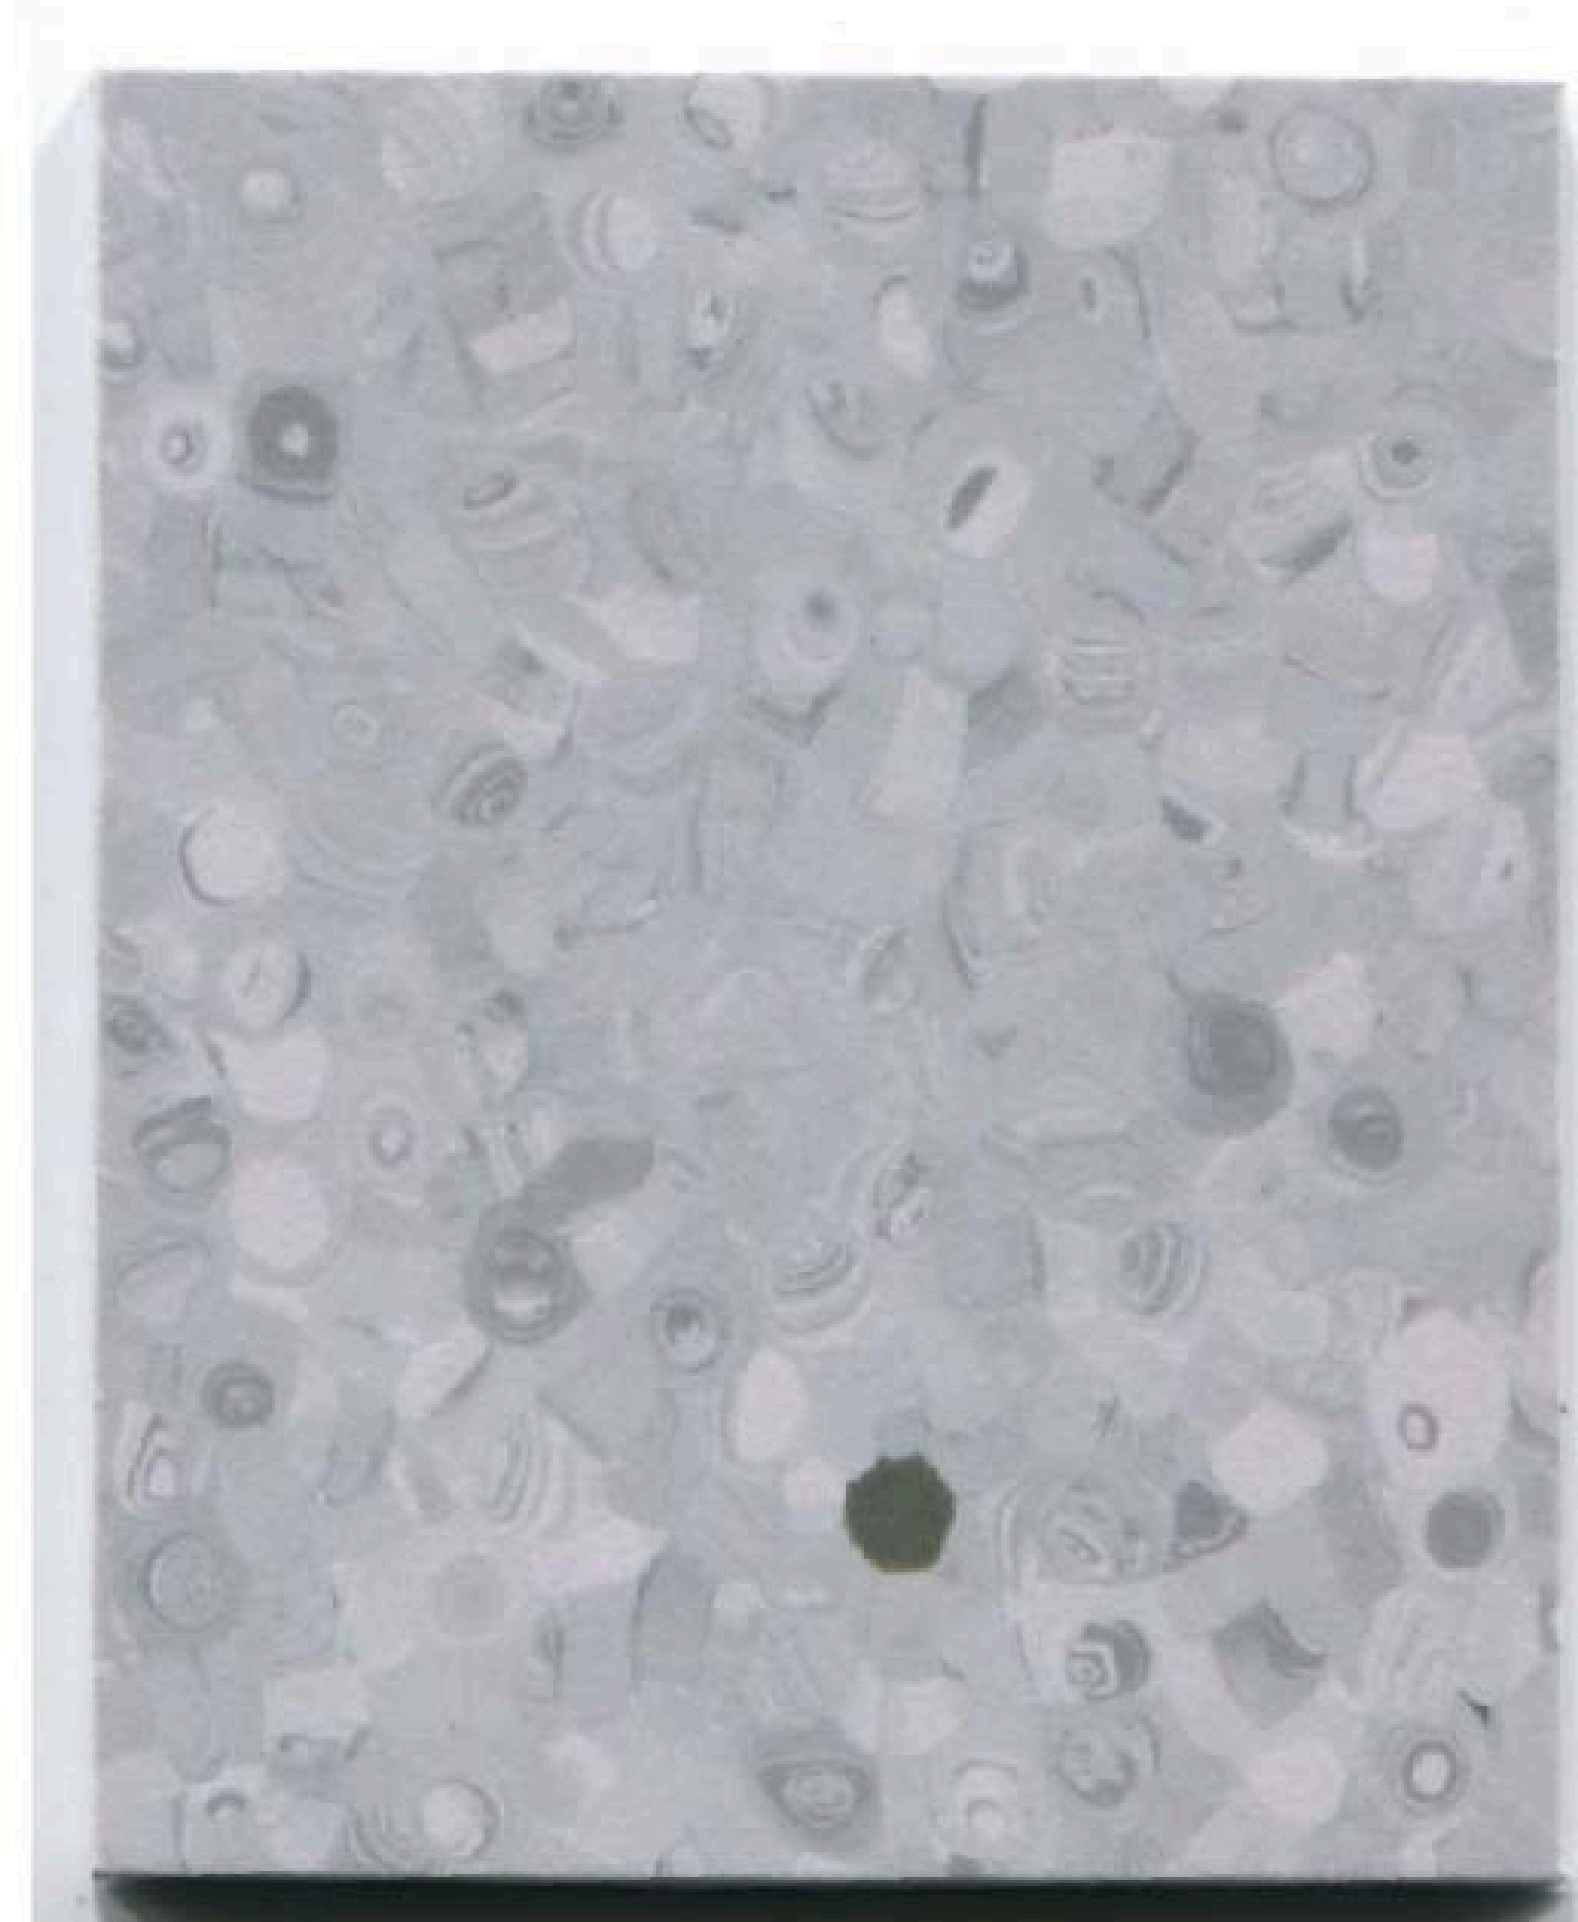

35002 Cloud Grey



35003 Cloud Black



350017 Pumice stone



350018 Camden Grey



35016 Rock




35004 Medintech Plus



35021 Cream



35020 Pearl

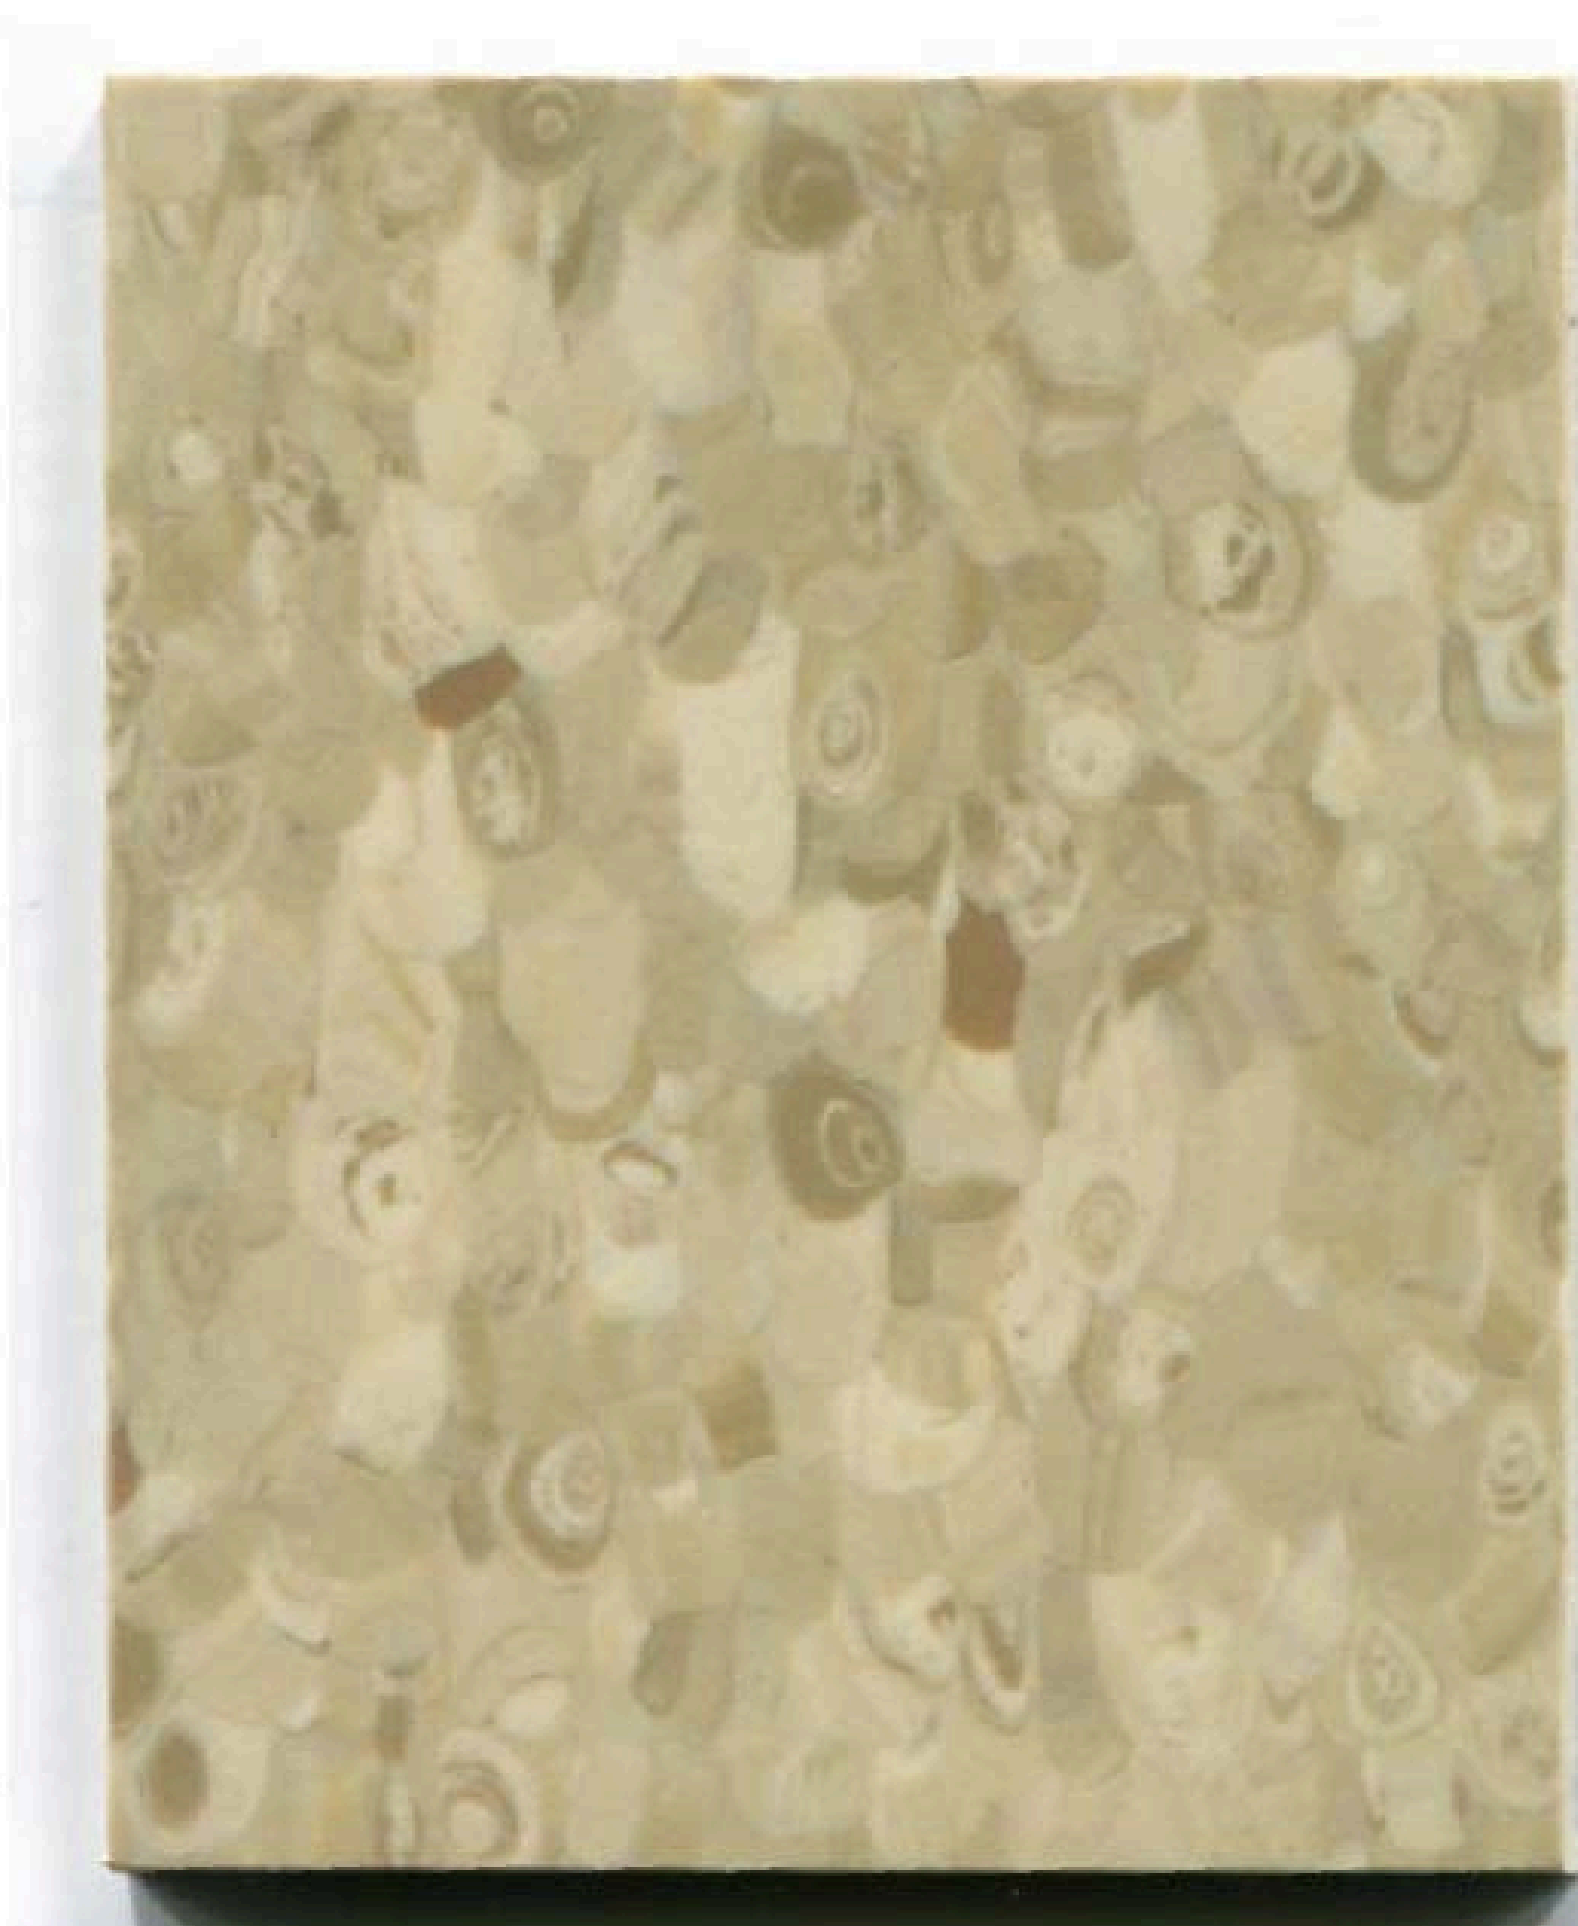

35019 Camden Grey



35006 Camden Grey



35007 Desert gold


TARGET 350

HOMOGENIOUS VINYL FLOORING

SIZE: 2.0mm x 2.0m x 20m



35009 Ultra blue

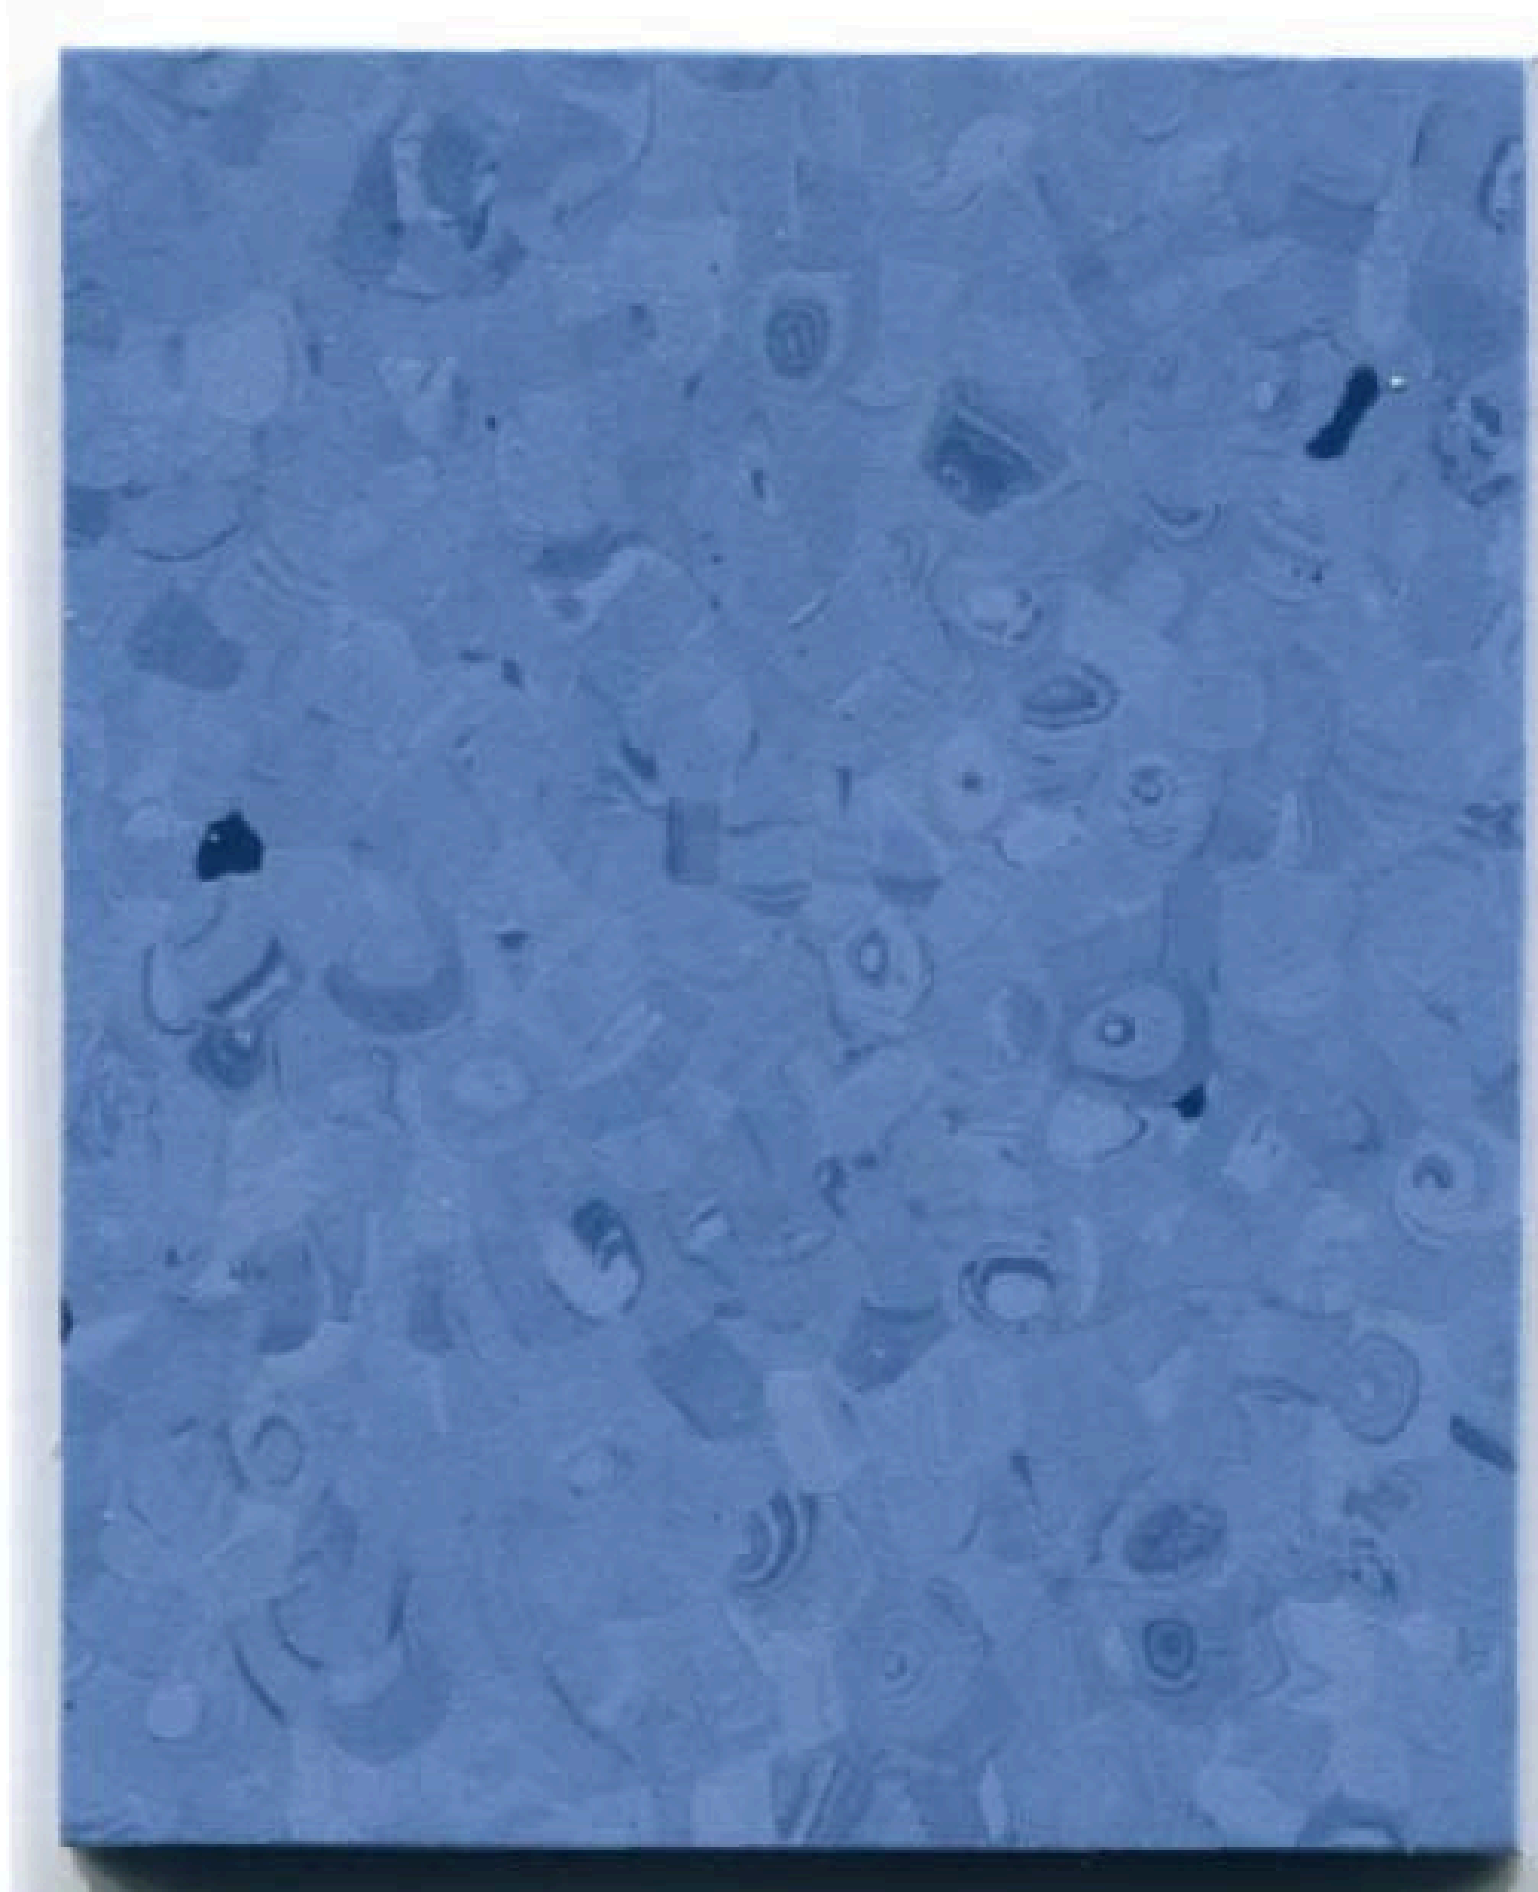


35024 Turquoise



35010 Deep Sea



35012 Light green

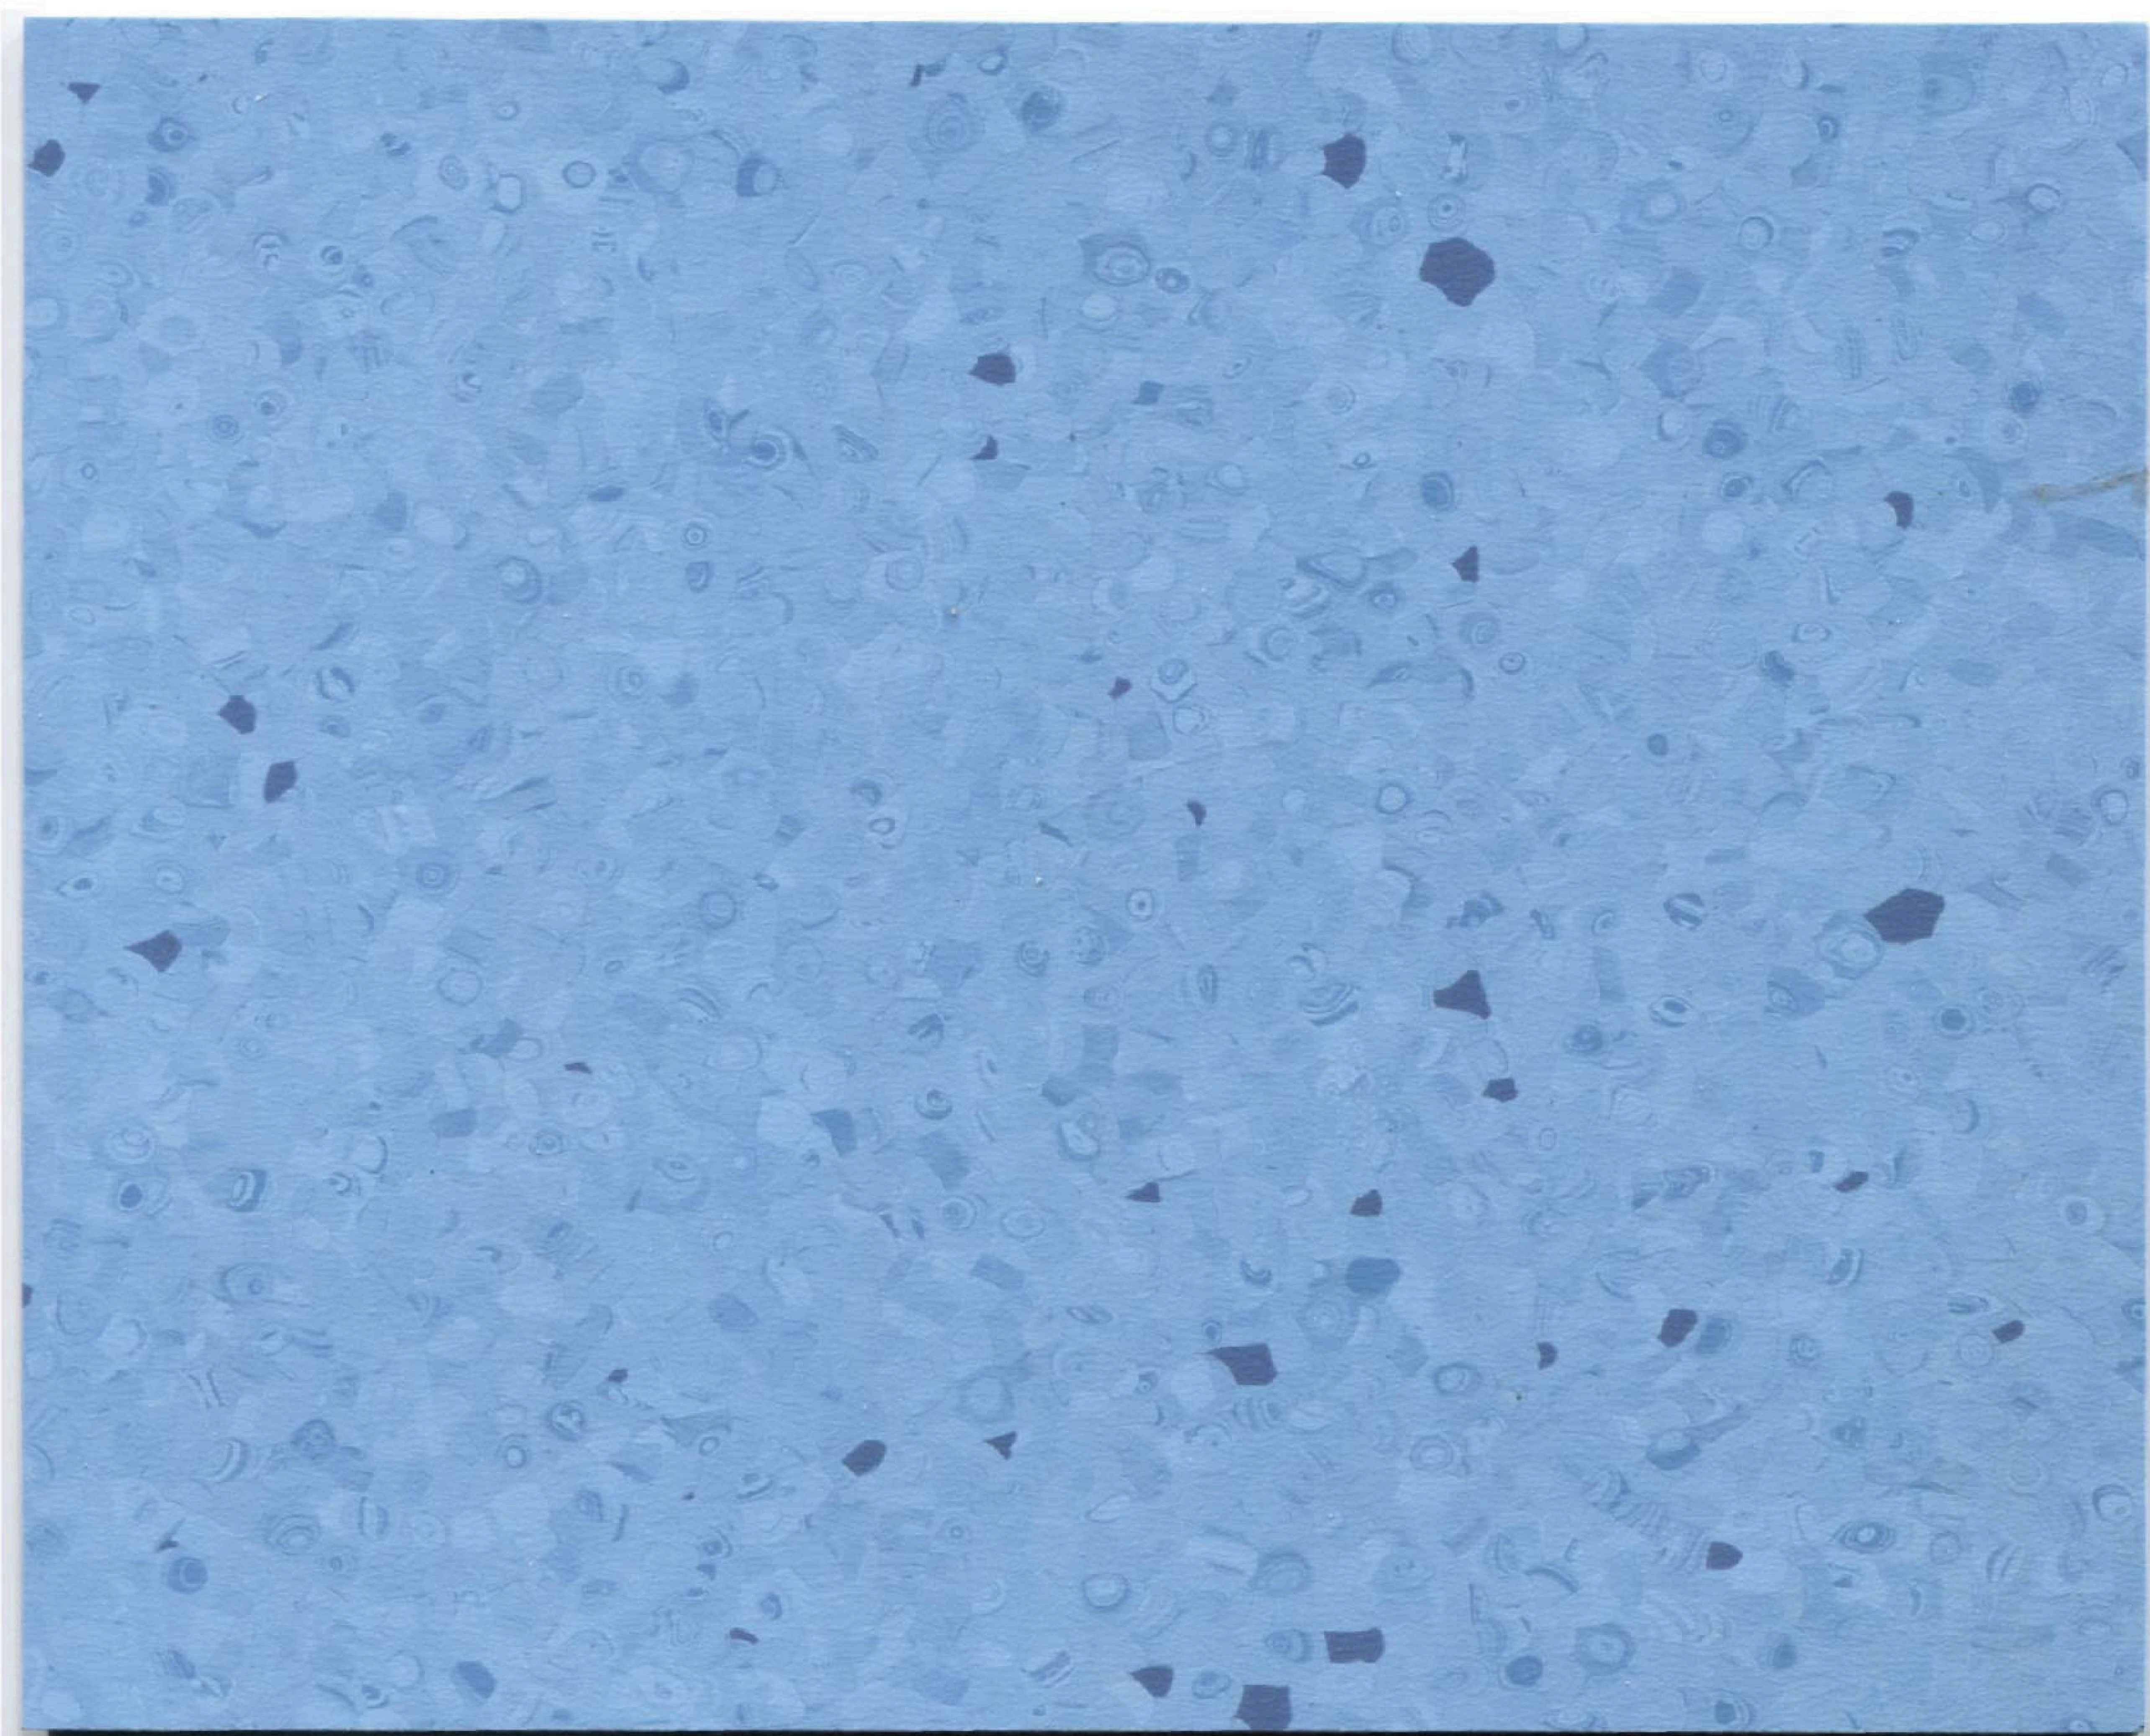

35008 Blue Skies



35025 Peak green



35026 Forest



35005 Coral



35022 Orange Zest



35023 Monarch Red



35011 Moss



Office 35002

Offers you an unparalleled service that covers every aspect of your building. From classrooms and children's rooms to meeting rooms, retail Spaces to public areas, stairwells, laboratories and operating rooms, we help you find the ideal material solution to meet the functional needs of different Spaces.

We have a wide range of products and extensive application expertise to meet your specific space needs. We look forward to supporting you.



Airport 35017/35002






HOMOGENEOUS VINYL FLOORING

THE HEAVY
TRAFFIC SOLUTION

Airport 35016



ARY HOSPITAL

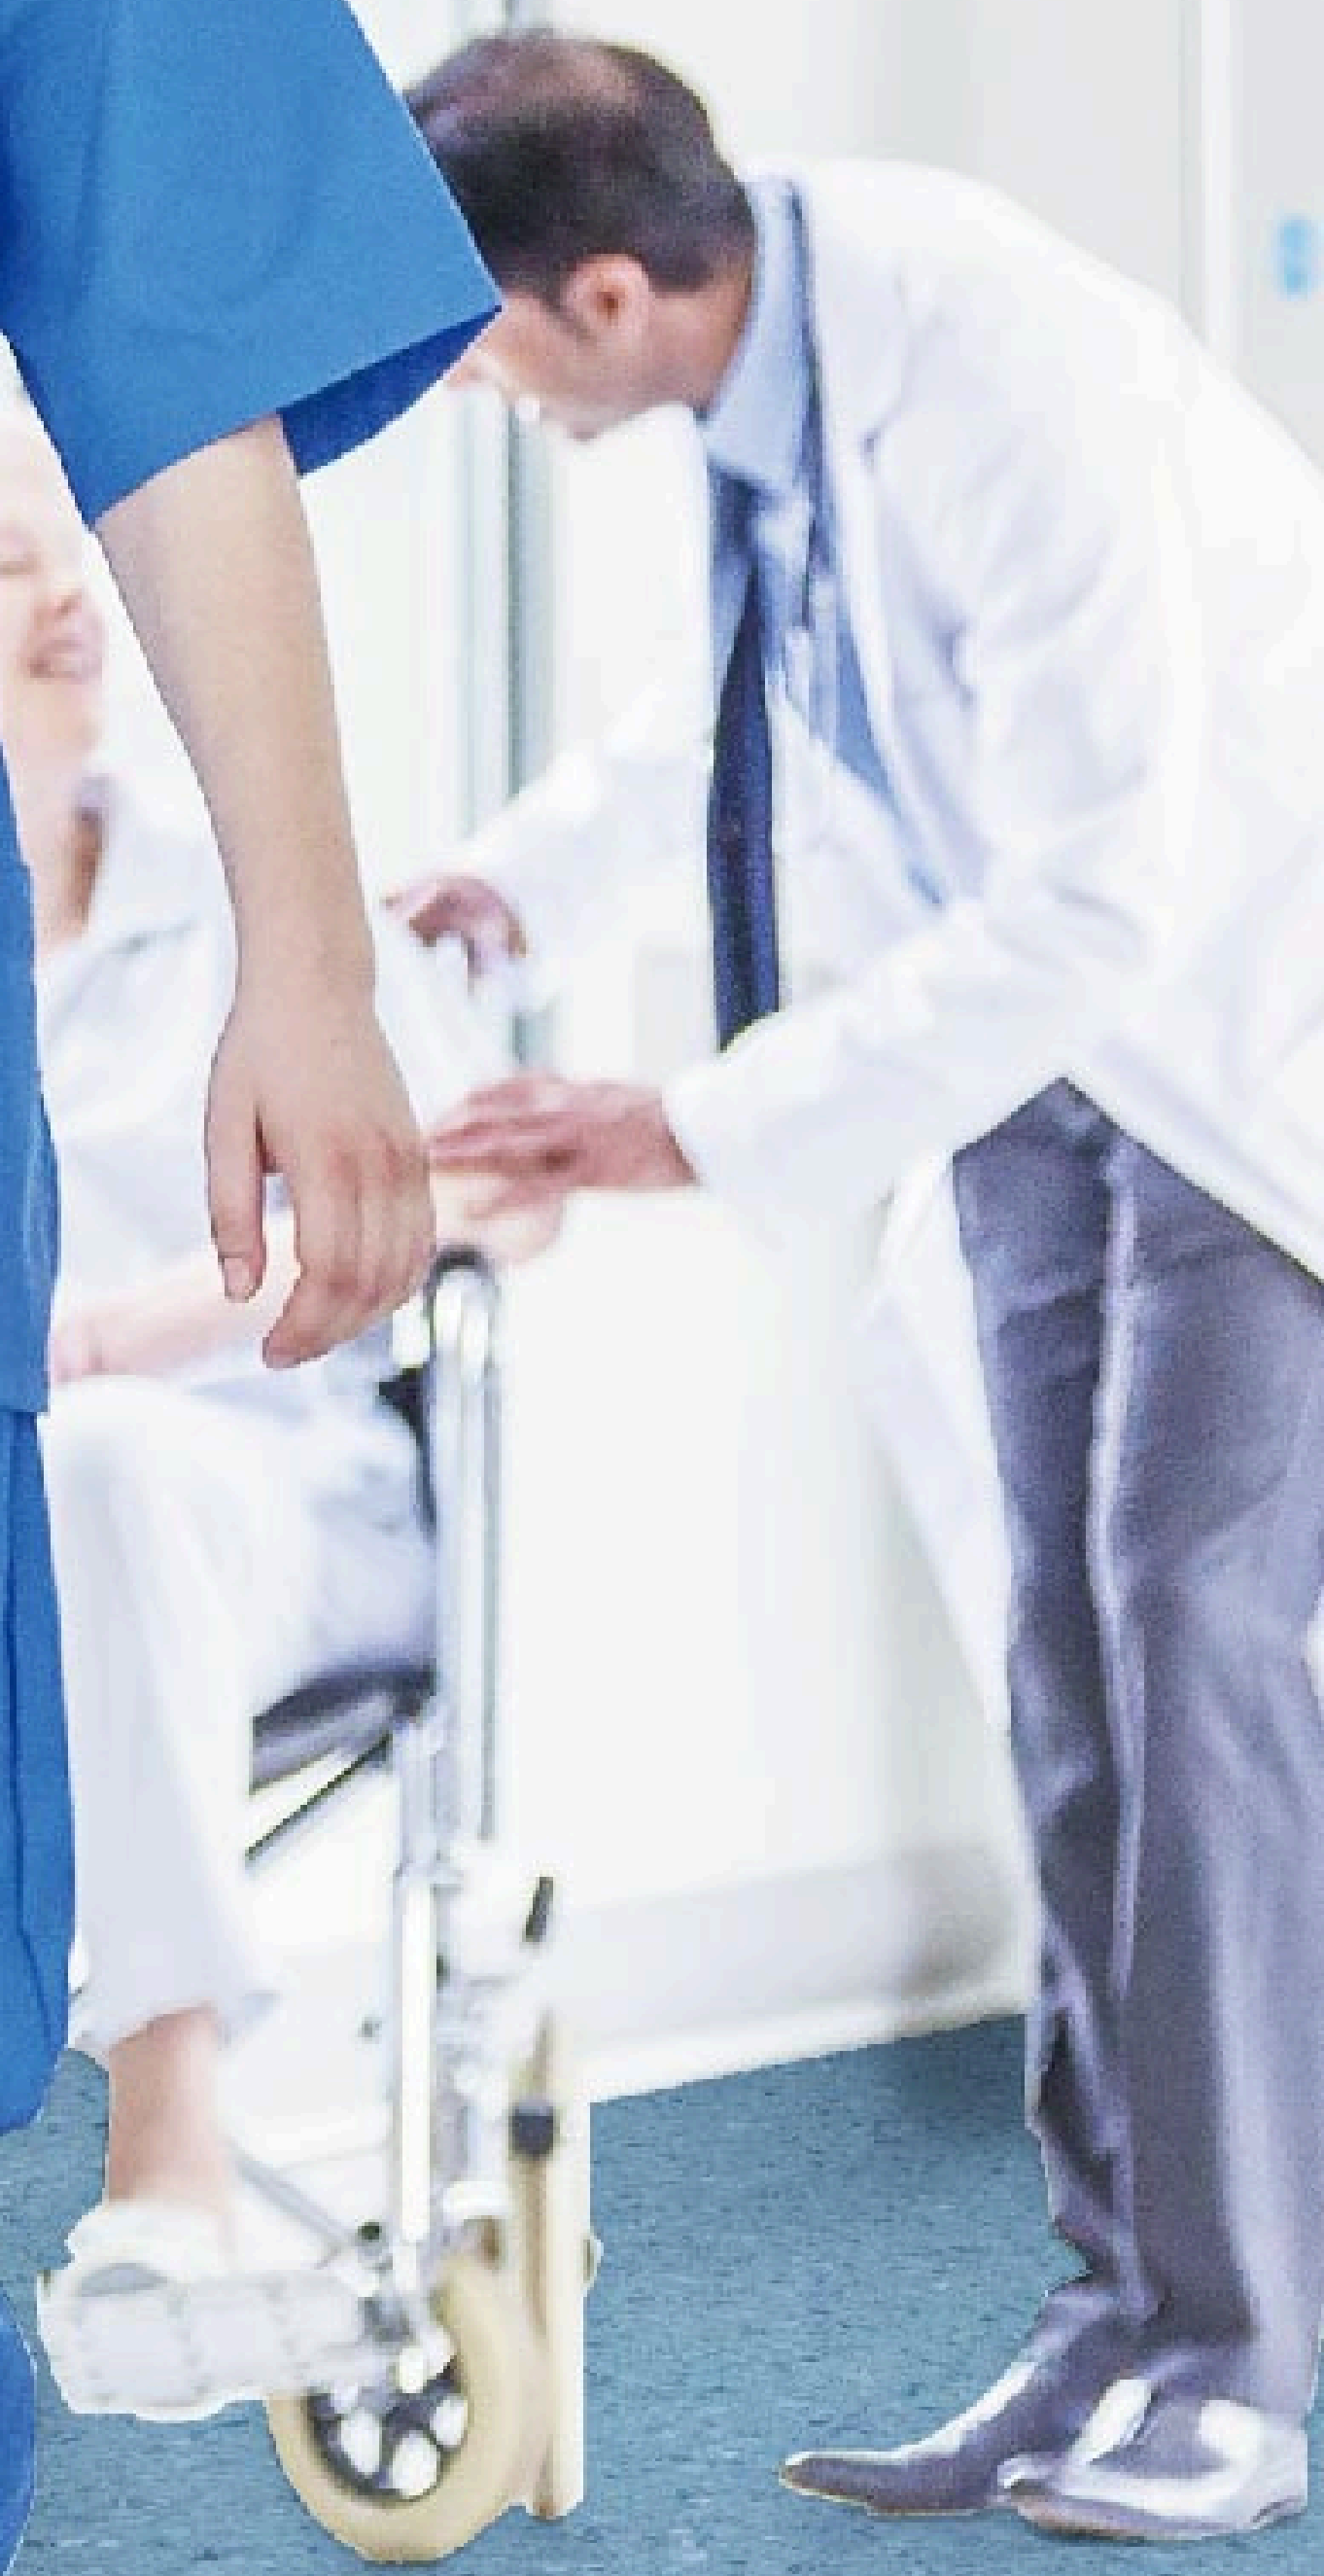

35009 Hospital



PRODUCT STRUCTURE



① Diamond-shield special coating

② Homogeneous uniform and dense texture



WELLNESS

Health

- Antibacterial activity {inhibits growth >99%}

Security

- Excellent skid resistance



COMPOSITION

100%REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



INDOOR AIR QUALITY

- TVOC emissions 10 times better than norms requirements {TVOC < 100µg/m³ after 28days}




Diamond-shield™
Special Coating

23-43

100% Recycle

TARGET 350

HOMOGENIOUS VINYL FLOORING

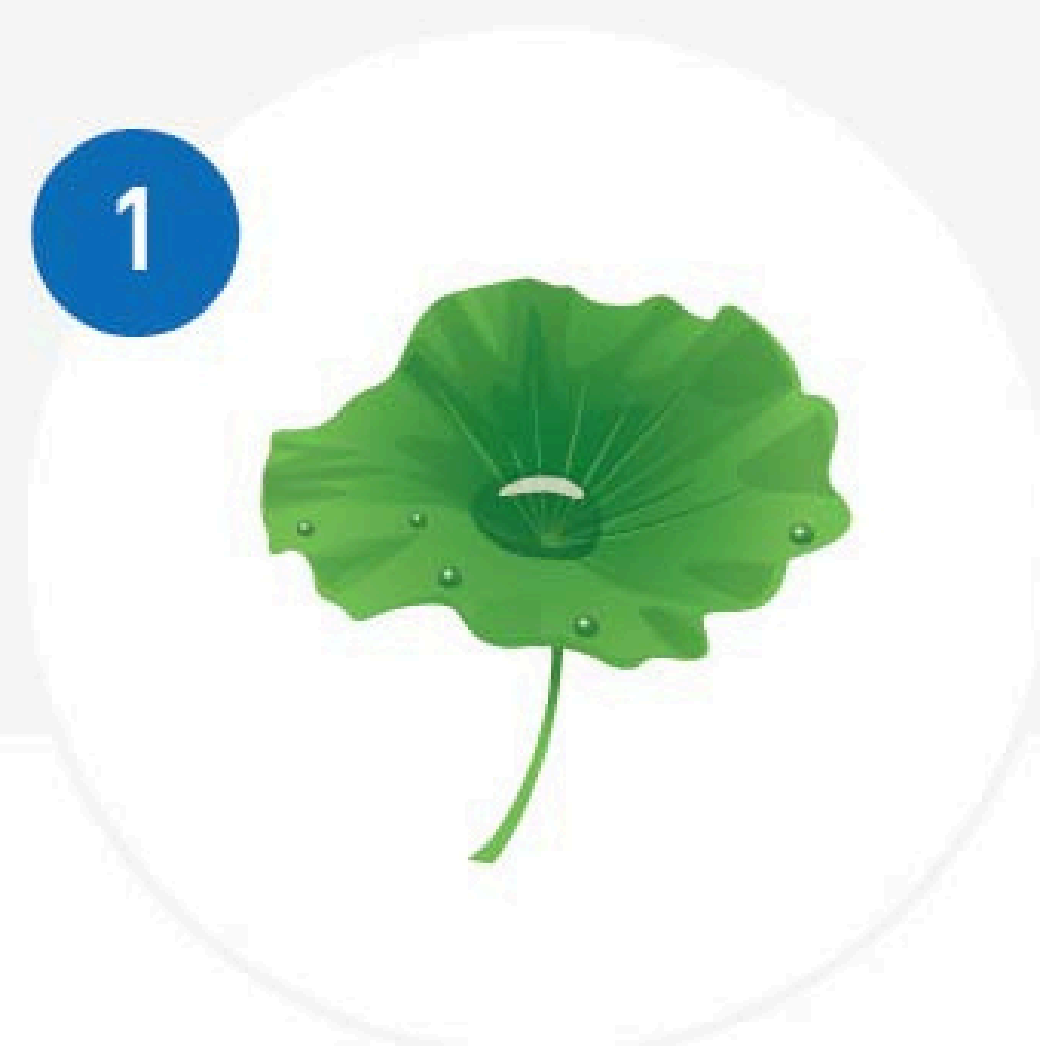


Lotus Leaf Effect

Superhydrophobic surface to reduce surface tension, making it difficult for water-based residuals to permeate



Super Wear-Resisting

Hard and clear as gemstones, with high strength wear resistant special ingredients, leaving no traces of damage and scratches.

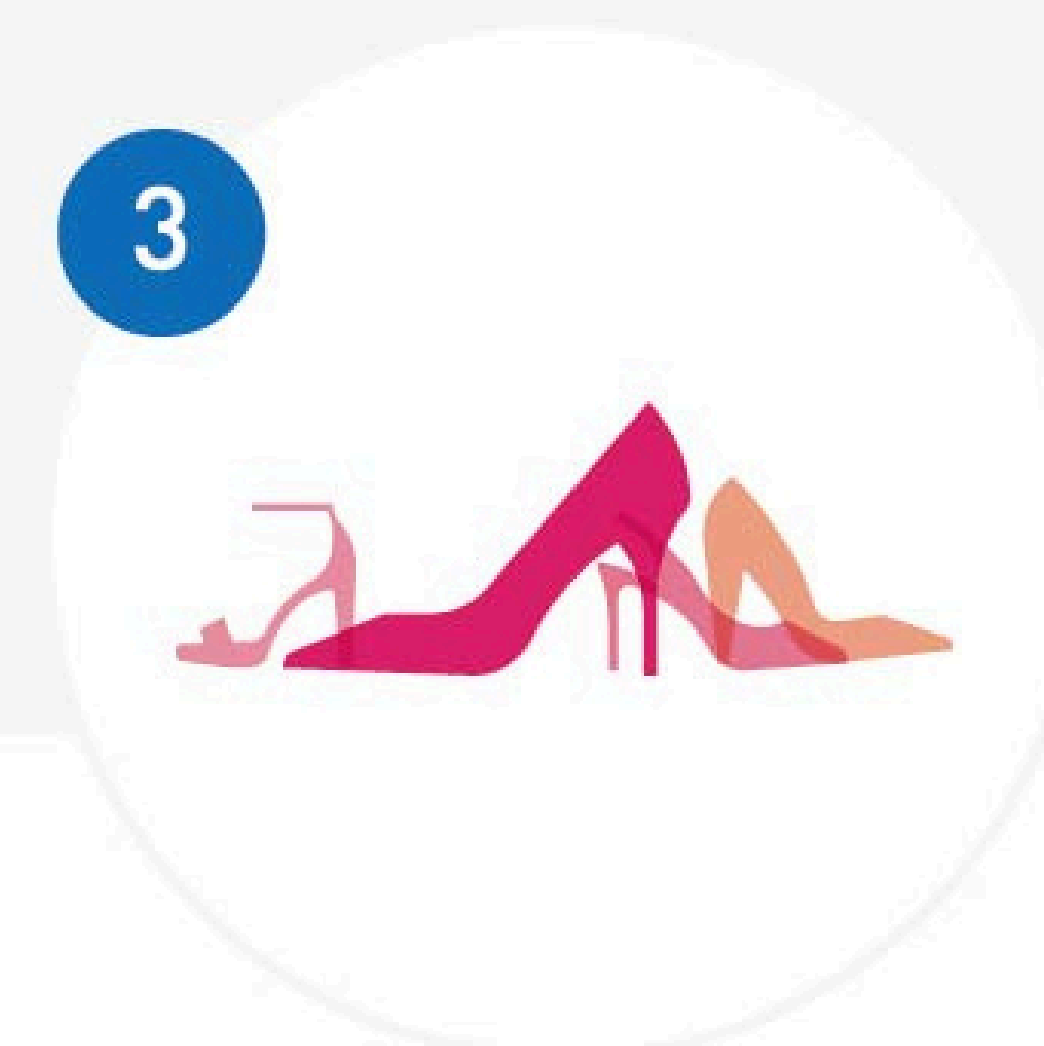

Resistance to the heel print

The synergistic effect makes heel marks and other stubborn stains harder to attach and easier to clean



Double Durability

Twice the average thickness of competing products making the surface protection system more durable for the ground.

TARGET 350

PRODUCT SPECIFICATIONS

Description	Standard	Unit	Result
Type of flooring	EN 649		Homogeneous Sheet
Material			Polyvinyl chloride resin
Safety Requirements			
Fire rating	EN 13501-1	class	Bf1
Slip resistance	DIN 51130	group	R9-R10
Toxic testing	GB-18586-2001	-	Qualified
Performance data			
Roll width	ISO 26987-2008	m	2.0
Roll length	ISO 26987-2008	m	20
Overall thickness	ISO 26987-2008	mm	2
Total weight	ISO 26987-2008	kg / m ²	2.75
Wear resistance	EN 649	group	T
Residual indentation	ISO 26987-2008	mm	0.04
Dimensional stability	ISO10581-2019	-	MD -0.1% AMD 0%
Colour fastness	ISO105-B02: 2014	-	≥6
Stain resistance	ISO26987: 2008 (E)	-	No stain
Special maintenance treatment		-	Diamond-shield special coating
Castor chair test	ISO4918: 2016	-	No Damage
Classification			
Homes	ISO 26987-2008	class	23 heavy duty
Commercial	ISO 26987-2008	class	34 very heavy duty
Industrial	ISO 26987-2008	class	43 heavy duty
Indoor air quality			
Formaldehyde Emission	EN717-1 : 2004	-	Not Detected
DOP content	EN15777	-	Not Contain
Heavy metal	EN71-3	-	Not Contain
VOC harmful substances	GB 18586-2001	-	PASS

The sample is only for reference of color selection.
Please refer to the actual sample.

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. If need the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C.

MAINTENANCE

No wax is needed right after installation. Maintenance should be carried out regularly to keep the appearance and well durability of the floor. The floorcovering should be maintained with regular sweeping and damp mooting using neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combines machine cleaning.




COMPOSITION
100% REACH compliant



**INDOOR
AIR QUALITY**



**RECYCLED
CONTENT**

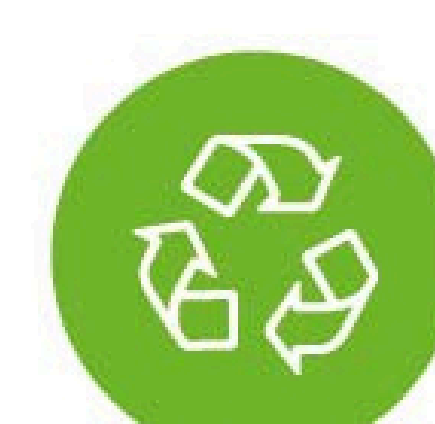

**RECYCLABILITY
100%**



WELLNESS



TARGET SPECIALTIES

📍 NR32 1HB, London Road North
Lowestoft, United Kingdom.

📍 Building Rema Plaza, Office No.1
Al Jurf 3 Ajman UAE

☎️ +971 502307822 ✉️ info@targetspecialties.com

LEARN MORE AT:
www.targetspecialties.com