




TARGET 550

HOMOGENIOUS VINYL FLOORING

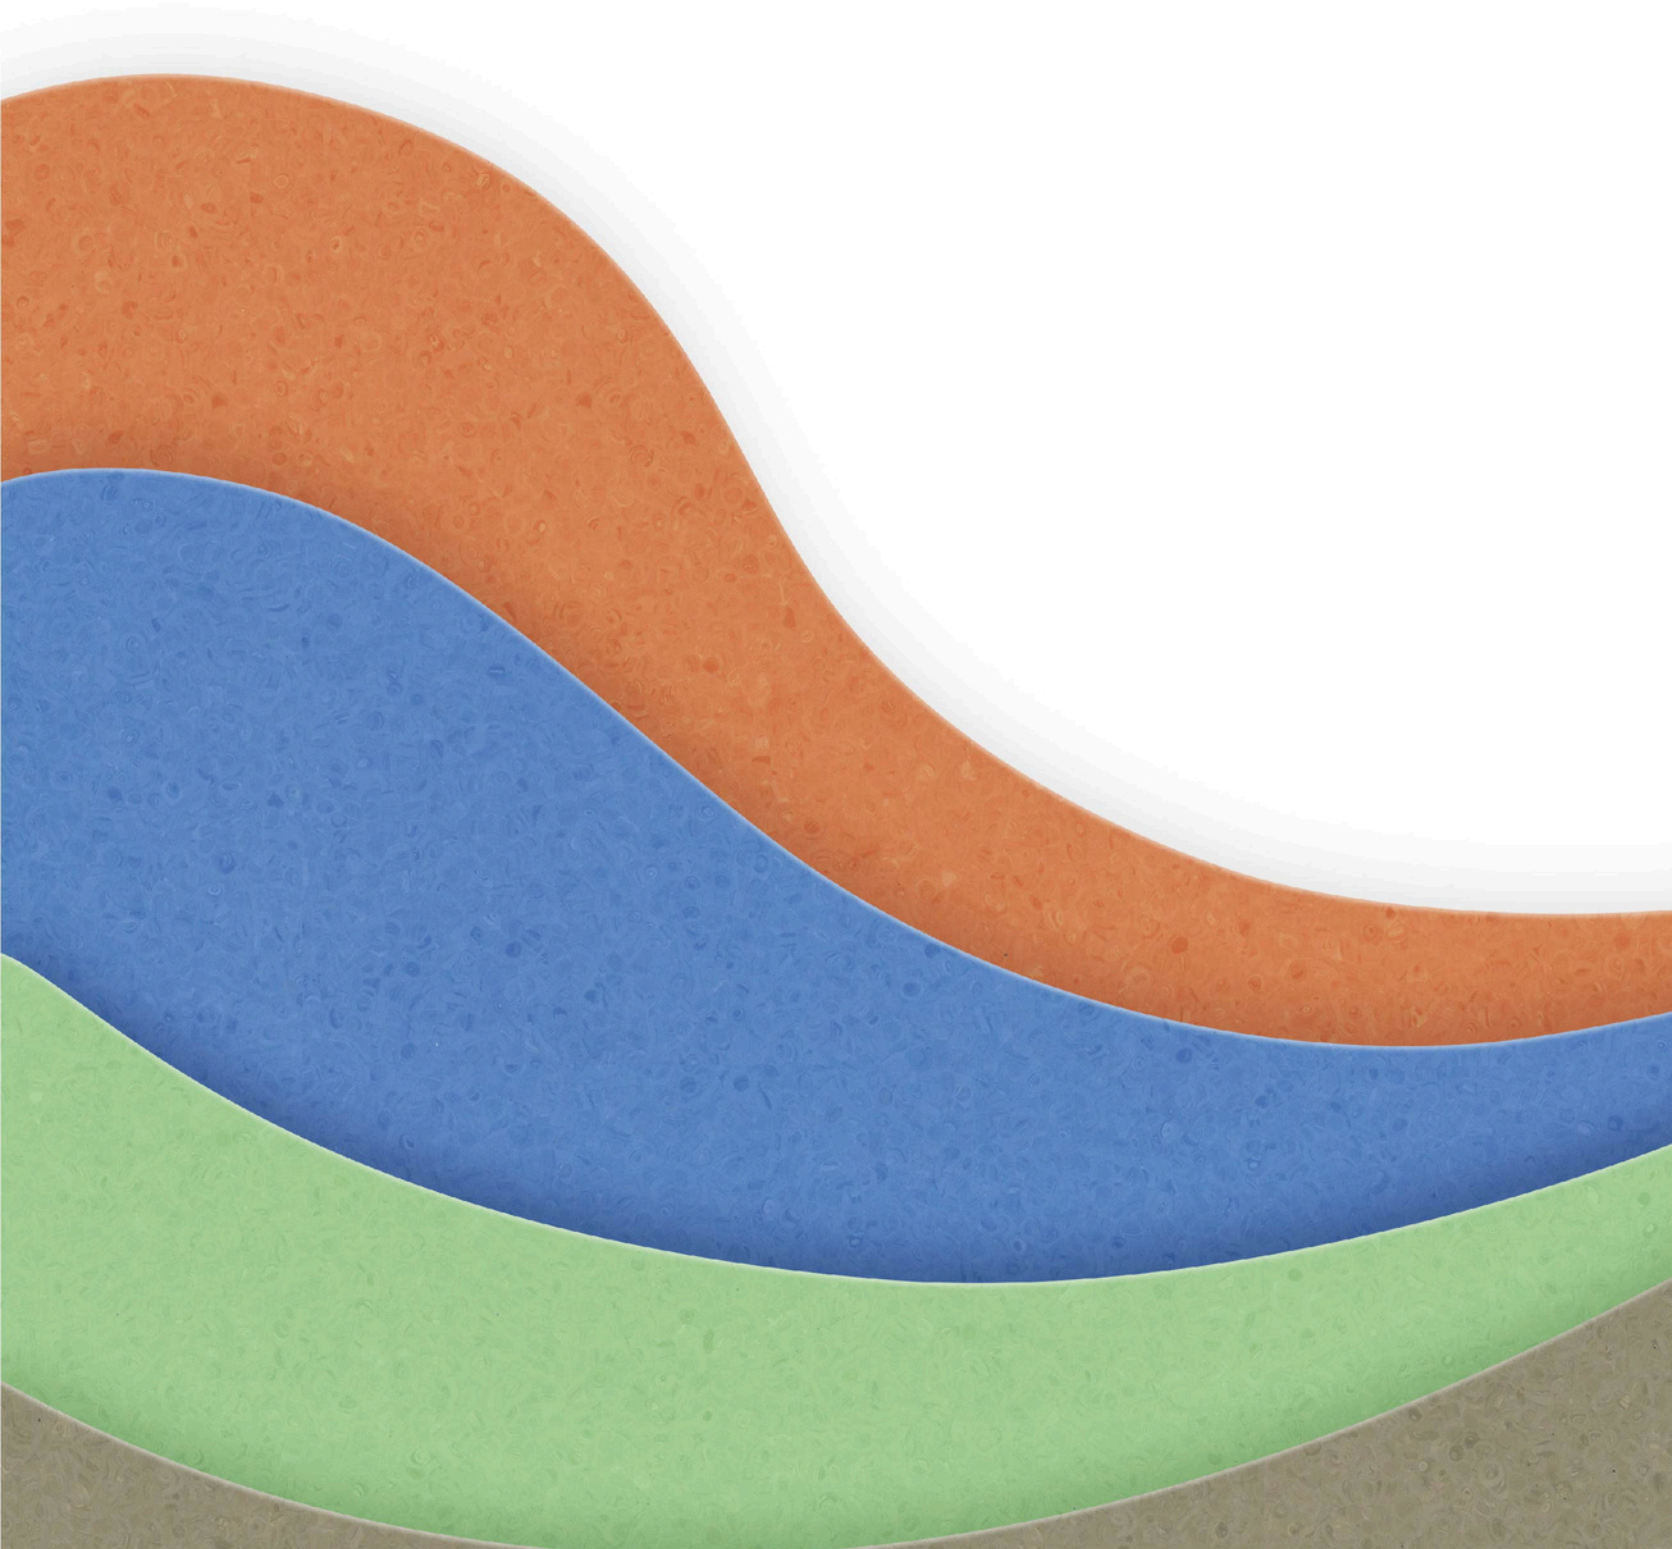

TARGET 550

HOMOGENIOUS VINYL FLOORING

SIZE: 2.0m x 2.0m x 20m




Soft Red

© 306014 015



Dark Bric

© 306014 013

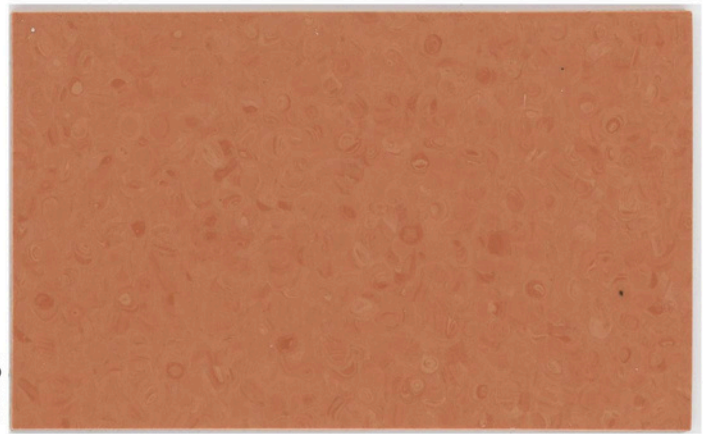

Orange

© 306014 014




Medium Warm Beige

© 306014 009




Dark Warm Beige

© 306014 010

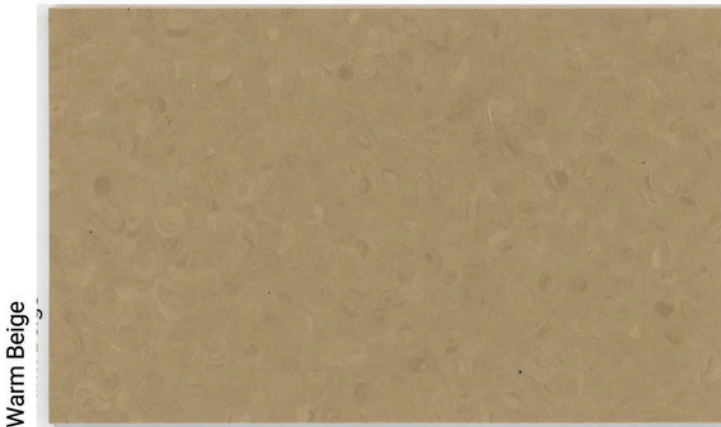

Warm Beige

© 306014 011

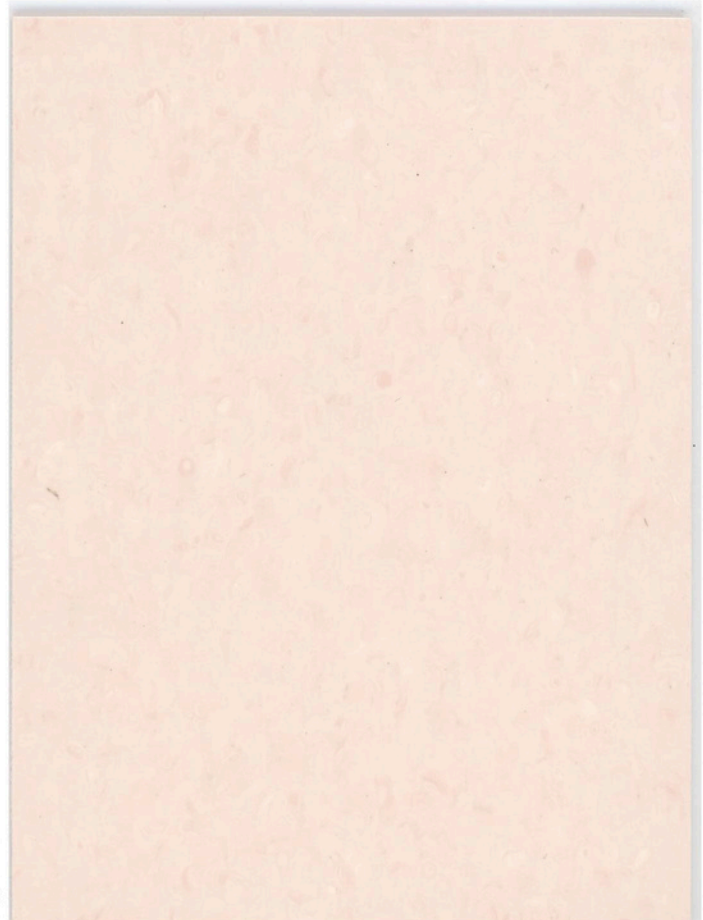

Light Pink

© 306014 212

NEW



TARGET 550

HOMOGENIOUS VINYL FLOORING

SIZE: 2.0m x 2.0m x 20m



Light Green

© 306014 021



Light Olive Green

© 306014 022



Medium Green

© 306014 023



Green

© 306014 024



Light Ocean Blue


© 306014 019



Light Blue

© 306014 214

NEW

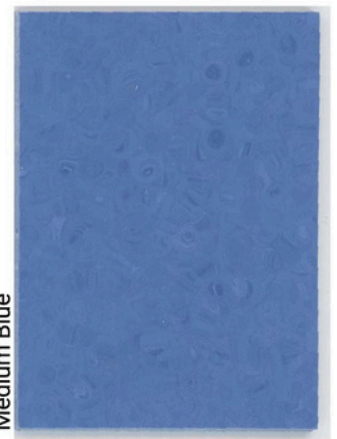


Medium Blue

© 306014 016



Ocean Blue

© 306014 020

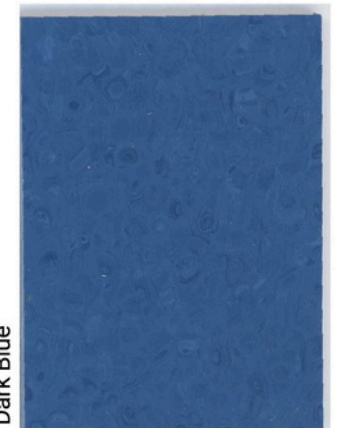

Dark Blue

© 306014 017



Midnight Blue



© 306014 018

TARGET 550

HOMOGENIOUS VINYL FLOORING

SIZE: 2.0mm x 2.0m x 20m



Clay Grey

© 306014 007



Dark Clay Grey

© 306014 006




Dark Brown

© 306014 012



Grey

© 306014 002

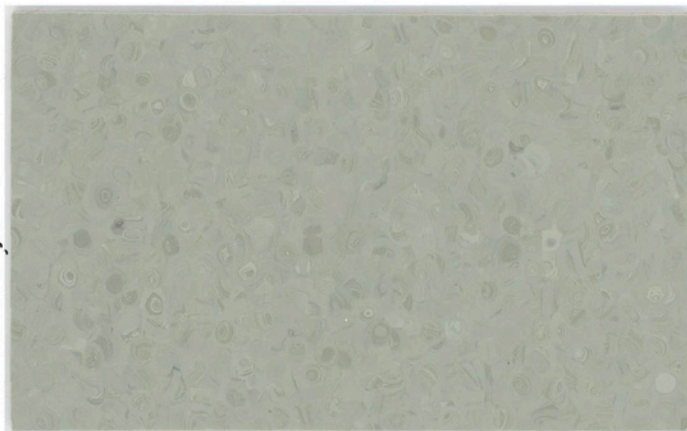

Medium Cool Grey

© 306014 001




Medium Grey

© 306014 003



Dark Warm Grey

© 306014 004

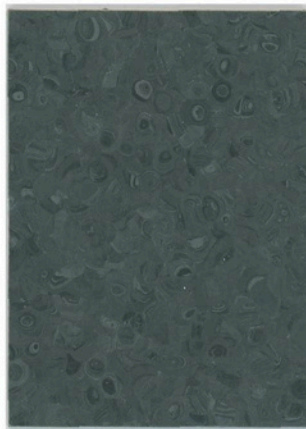

Dark Cool Grey

© 306014 005



Black

© 306014 008



Healthy Safe Environment

Adhering to the concept of health, safety and environmental protection, Target Floor constantly optimizes and improves the raw material formula of PVC floor products, and the products use environmentally friendly non-phthalic plasticizers to ensure a healthy and safe environment for users.



Excellent interior Air quality

TVOC is a general term for volatile organic compounds, mainly derived from the combustion products of fuels and artifacts (such as interior decoration materials, paints, furniture, flooring, etc.). The TVOC emission of Target Floor products is close to zero, which is the leading level in the industry and guarantees excellent indoor air quality.




Best product Life cycle cost

Unique diamond shield surface treatment technology, combined with excellent product structure, make the product highly stain resistant, wear resistant, easy to clean and maintain, to achieve the best life cycle cost.



PRODUCT STRUCTURE

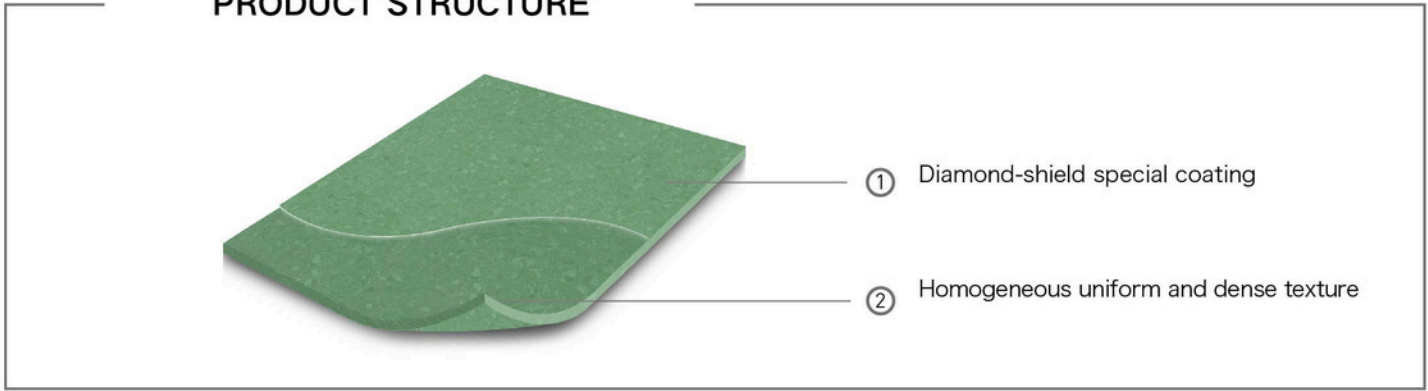

WELLNESS

Health

- Antibacterial activity {inhibits growth >99%}

Security

- Excellent skid resistance



COMPOSITION

100%REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



INDOOR AIR QUALITY

- TVOC emissions 10 times better than norms requirements {TVOC < 15µg/m³ after 28days}




Diamond-shield™
Special Coating

23-43

100% Recycle

TARGET 550

HOMOGENIOUS VINYL FLOORING




Lotus Leaf Effect

Superhydrophobic surface to reduce surface tension, making it difficult for water-based residuals to permeate




Super Wear-Resisting

Hard and clear as gemstones, with high strength wear resistant special ingredients, leaving no traces of damage and scratches.



Resistance to the heel print

The synergistic effect makes heel marks and other stubborn stains harder to attach and easier to clean



Double Durability

Twice the average thickness of competing products making the surface protection system more durable for the ground.

TARGET 550

HOMOGENIOUS VINYL FLOORING

PRODUCT SPECIFICATIONS

Description	Standard	Unit	Result
Type of flooring	EN 649		Homogeneous Sheet
Material			Polyvinyl chloride resin
Safety Requirements			
Fire rating	EN 13501-1	class	Bf1
Slip resistance	DIN 51130	group	R9-R10
Toxic testing	GB-18586-2001	-	Qualified
Performance data			
Roll width	ISO 26987-2008	m	2.0
Roll length	ISO 26987-2008	m	20
Overall thickness	ISO 26987-2008	mm	2
Total weight	ISO 26987-2008	kg / m ²	2.75
Wear resistance	EN 649	group	T
Residual indentation	ISO 26987-2008	mm	0.04
Dimensional stability	ISO10581-2019	-	MD -0.1% AMD 0%
Colour fastness	ISO105-B02: 2014	-	≥6
Stain resistance	ISO26987: 2008 (E)	-	No stain
Special maintenance treatment		-	Diamond-shield special coating
Castor chair test	ISO4918: 2016	-	No Damage
Classification			
Homes	ISO 26987-2008	class	23 heavy duty
Commercial	ISO 26987-2008	class	34 very heavy duty
Industrial	ISO 26987-2008	class	43 heavy duty
Indoor air quality			
Formaldehyde Emission	EN717-1: 2004	-	Not Detected
DOP content	EN15777	-	Not Contain
Heavy metal	EN71-3	-	Not Contain
VOC harmful substances	GB 18586-2001	-	PASS

The sample is only for reference of color selection.
Please refer to the actual sample.

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. If need the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C.

MAINTENANCE

No wax is needed right after installation. Maintenance should be carried out regularly to keep the appearance and well durability of the floor. The floorcovering should be maintained with regular sweeping and damp mooting using neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combines machine cleaning.



COMPOSITION
100%REACH compliant



INDOOR
AIR QUALITY



RECYCLED
CONTENT



RECYCLABILITY
100%



WELLNESS



TARGET SPECIALTIES



TARGET SPECIALTIES



TARGET SPECIALTIES



TARGET SPECIALTIES

TARGET SPECIALTIES



NR32 1HB, London Road North
Lowestoft, United Kingdom.



Building Rema Plaza, Office No.1
Al Jurf 3 Ajman UAE



+971 502307822



info@targetspecialties.com

LEARN MORE AT:

www.targetspecialties.com