



Swing Deck Acadia Muir Woods



TARGET SPECIALTIES
WALLCOVERING





SWING DECK ACADIA MUIR WOODS



Versa Swing Deck Acadia Muir Woods - A178-508




TS15-212-Lake-Placid




TS15-209-Denali




TS15-211-Joshua-Tree

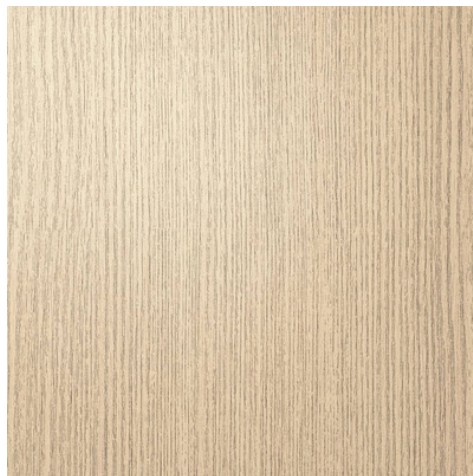

TS15-210-Dune

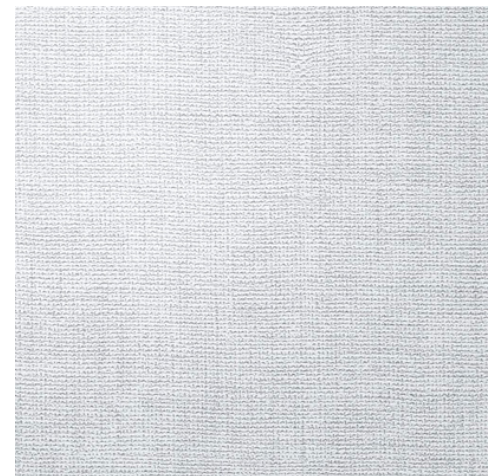


Lavish Ash Grey_A197-081

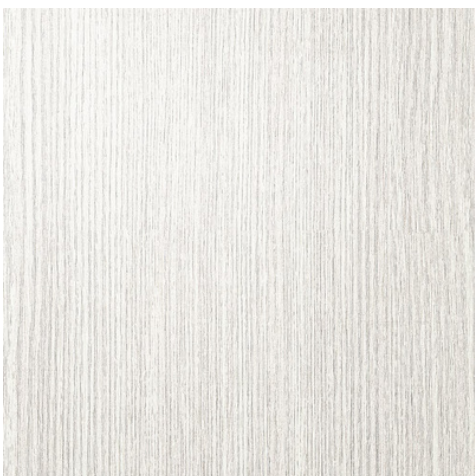

TS15-208-Glacier



Lavish Grey_A197-081

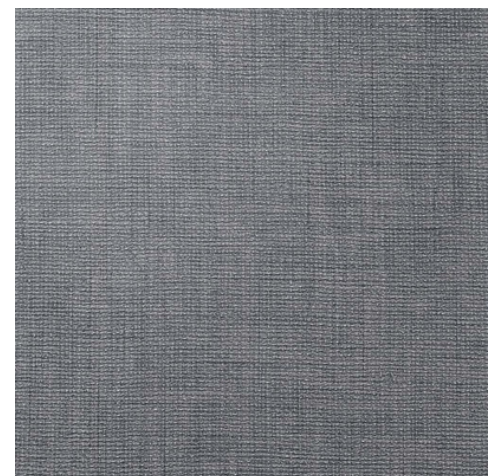


Lavish Sterling_A197-561



SWING DECK ACADIA MUIR WOODS



Lavish Desert Bay_A197-106

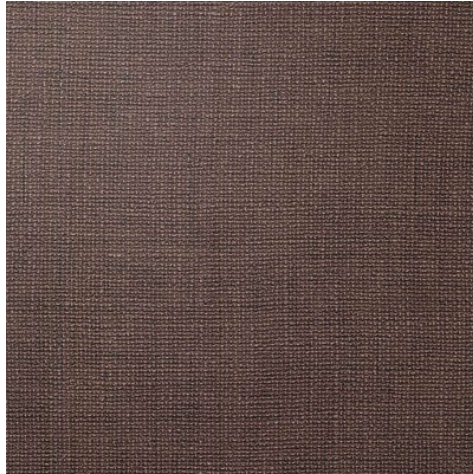

Lavish Trunk_A197-153



Lavish Comfort_A197-153



Chiba V15-101-Oyster



Chiba V15-101-Oyster



Chiba V15-103-Oregano



Chiba V15-104-Coffee-Bean



Chiba V15-105-Mustard-Seed



Chiba V15-106-Pekoe



SWING DECK ACADIA MUIR WOODS



Rolet V15-126-Sea-Salt



Rolet V15-127-Procelain



Rolet V15-128-Fossil



Rolet V15-128-Fossil



Rolet V15-129-Candlewick



Rolet V15-130-Daredevil



PRODUCT SPECIFICATIONS

Target Specialties 15/20 oz. pattern meets or exceeds all Type I requirements of CCC-W-408D and W-101.

Specifications: Performance:

Weight(Avg.):15/20 oz/ly (340 gr/m²)
Width: 52/54" (132/137cm)
Backing: Scrim
Installation: Straight Hang / Random Match
Custom colors, weights, widths and microventing are available.

Fire Safety:

- Class A -ASTM E-84(GRC)
- NFPA 101 Life Safety Code
- CAN/ULC S102

Environmental and Health:

- Phthalate Free
- Health Product Declaration
- Environmental Product Declaration
- Meets State of Washington Building Specification for Indoor Air Quality
- Meets California Section 01350 Indoor Air Quality Standard
- Aggressive manufacturing materials recovery and reuse program
- Highly cleanable water-based inks
- Free of PBDE's (Brominated Flame Retardants)

USGBC LEED Support:

- Supports USGBC LEED v4.1Criteria
- Materials and Resources; Building Product Disclosure and Optimization (includes Recycled Content; Construction Waste Management; HPD's)
- Indoor Environmental Quality; Low emitting materials

Moisture, Mold and Mildew:

Vinyl wallcovering functions as a vapor barrier. If water or moisture becomes trapped between the wallcovering and wall cavity, an increased risk of mold may occur. Consult a building design professional on the proper use of vinyl wallcovering.

A mildew inhibiting agent has been added to help protect against fungal and other microbiological growth. No additives however, will prevent mold growth if moisture is allowed to accumulate and its sources are not eliminated.

Further protection against mold growth may be achieved with Target Specialties Permavent®, a unique microventing technology that literally "breathes," helping manage the mobile moisture in walls.

Warranty:

Target Specialties is guaranteed to be free of defects in workmanship and material for five years. For additional details on moisture management, Permavent, warranty and other Target Specialties innovations, visit our website at www.targetspecialties.com



TARGET SPECIALTIES



TARGET SPECIALTIES



TARGET SPECIALTIES



TARGET SPECIALTIES

TARGET SPECIALTIES PVT LTD UK



info@targetspecialties.com



www.targetspecialties.com